



LOW FLOW TRIM

5-20-LFT-☐☐


ORDER
FAX CLUMP # 800

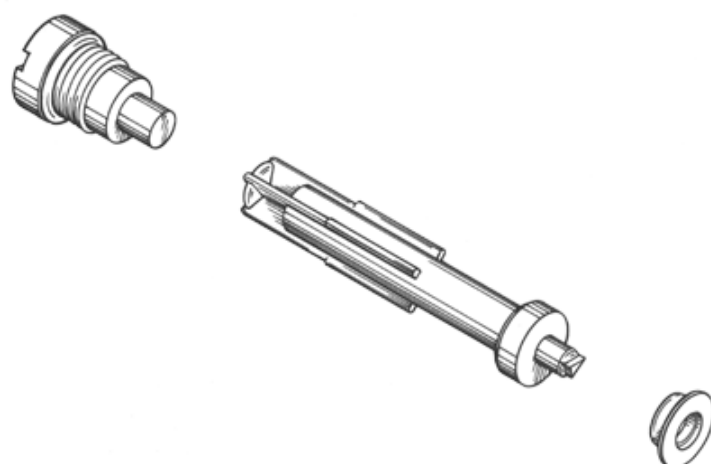

LOW FLOW TRIM

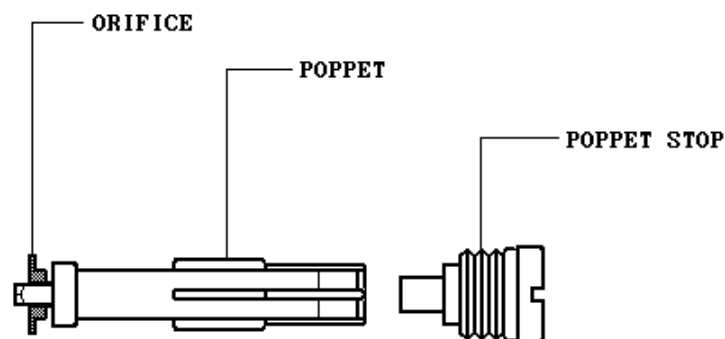5-20-LFT-☐☐


POPPET

5-16--.



ORDER
FAX CLUMP # 880




POPPET

5-16--.

INDICATOR TRIM

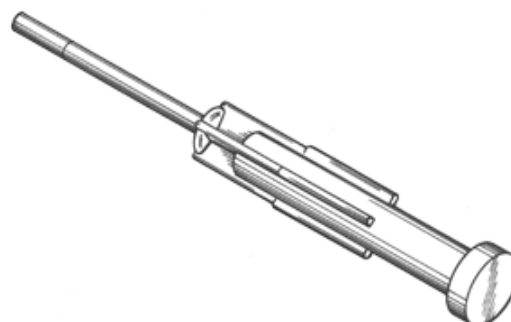5-17--.*ORDER**FAX CLUMP # 802*

INDICATOR TRIM

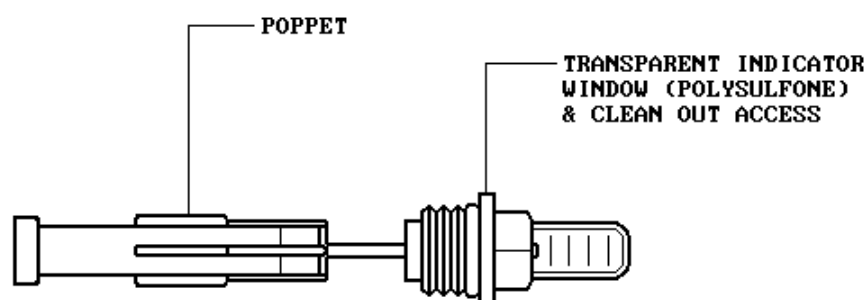5-17--.


HOLLOW MAGNETIC FLOAT

10-700-FT-☐

ORDER
FAX CLUMP # 803




HOLLOW MAGNETIC FLOAT

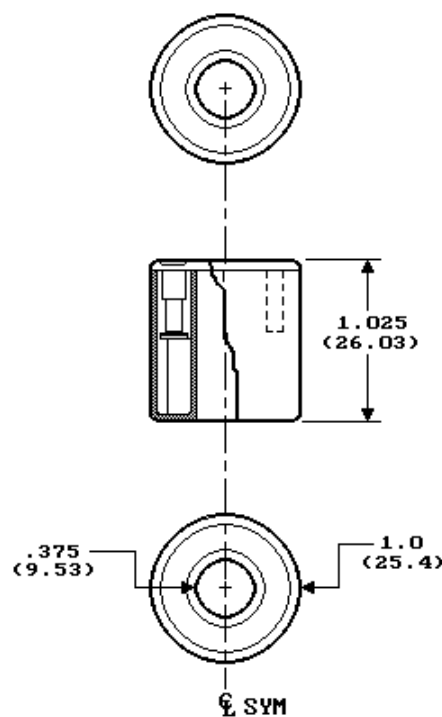10-700-FT-☐

FOAM MAGNETIC FLOAT

10-770




ORDER
FAX CLUMP # 804



FOAM MAGNETIC FLOAT


10-770

MATERIAL: UNICELLULAR
POLYPROPYLENE FOAM

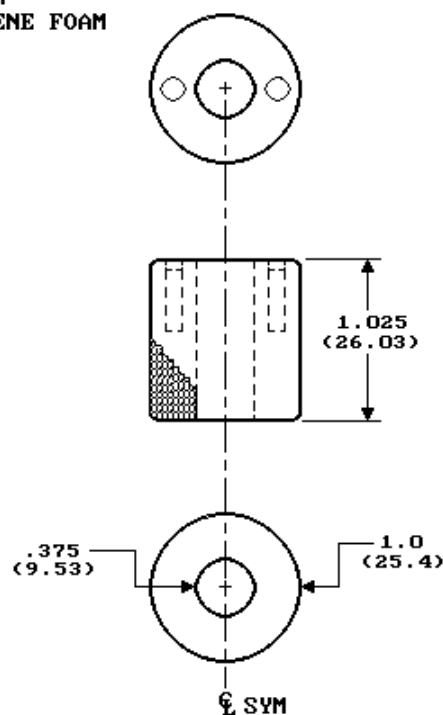

SIDE MTD MAGNETIC FLOAT

10-784

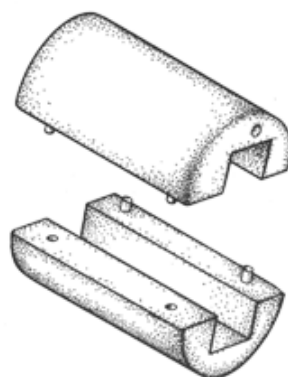


ORDER
FAX CLUMP # 805



SIDE MTD MAGNETIC FLOAT

10-784


MATERIAL: UNICELLULAR
POLYPROPYLENE FOAM

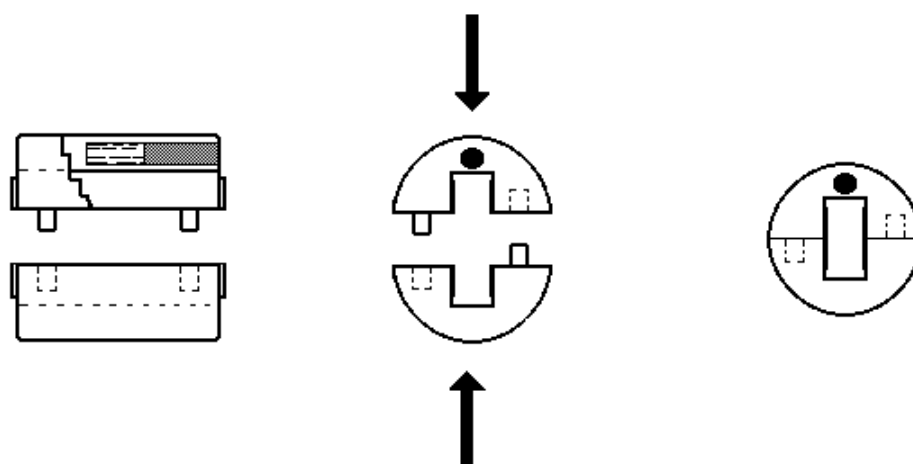

ASSEMBLE FLOAT HALVES ON
10-782-PP LEVEL SWITCH STEM.
PRESS HALVES TOGETHER TO
FORM SIDE MOUNTED SWITCH.



ANGLE CONNECTOR

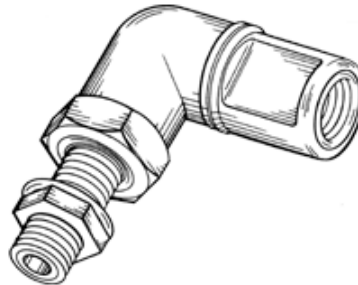
10-700-CA-☐☐

ORDER
FAX CLUMP # 806




ANGLE CONNECTOR

BULKHEAD THICKNESS .50 (12.70) MAX

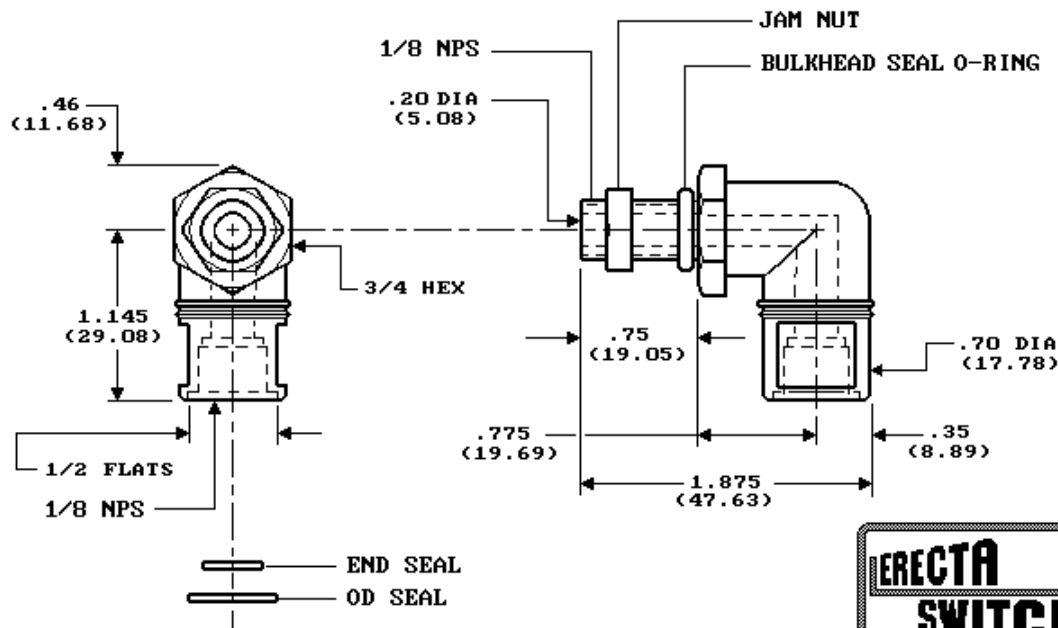10-700-CA-☐☐


1/4 BULKHEAD FITTING

10-701-BH-☐☐


ORDER
FAX CLUMP # 807



1/4 BULKHEAD FITTING

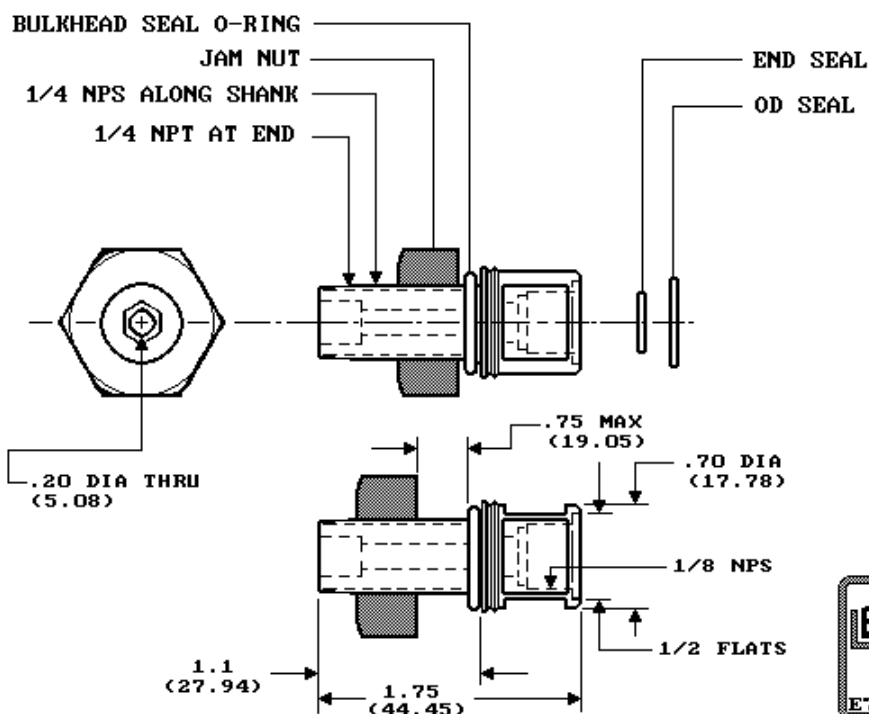10-701-BH-☐☐


1/4 (HEX) BULKHEAD FITTING

10-702-BH-☐☐

ORDER
FAX CLUMP # 808



1/4 (HEX) BULKHEAD FITTING

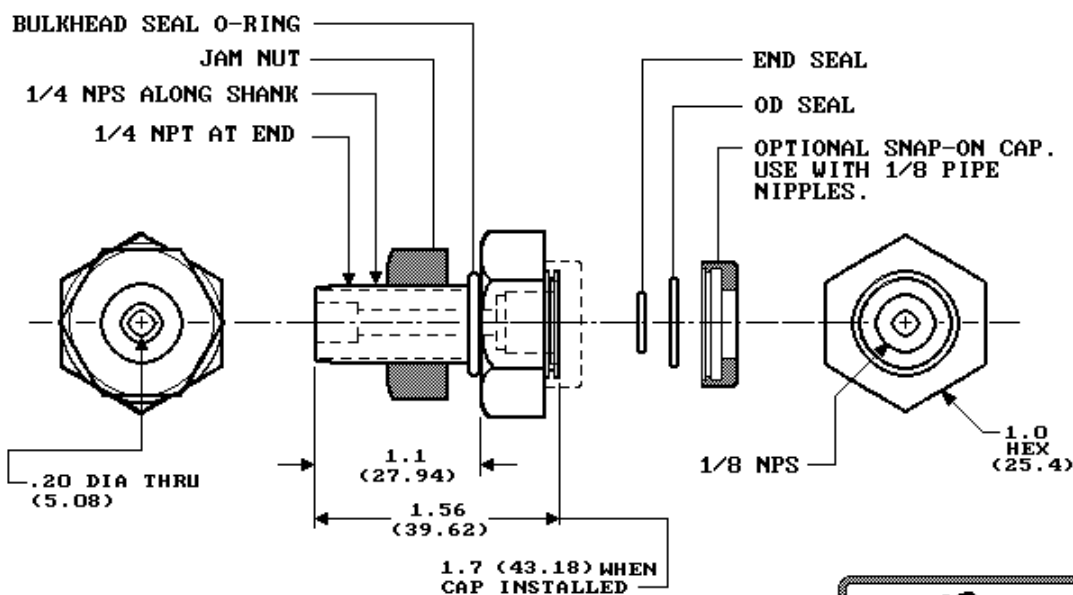
10-702-BH-☐☐

BULKHEAD THICKNESS .75 (19.05) MAX



1/4 BULKHEAD/1/2M/1/8F FITTING

10-703-BH-□□




ORDER
FAX CLUMP # 809



1/4 BULKHEAD/1/2M/1/8F FITTING

10-703-BH-□□

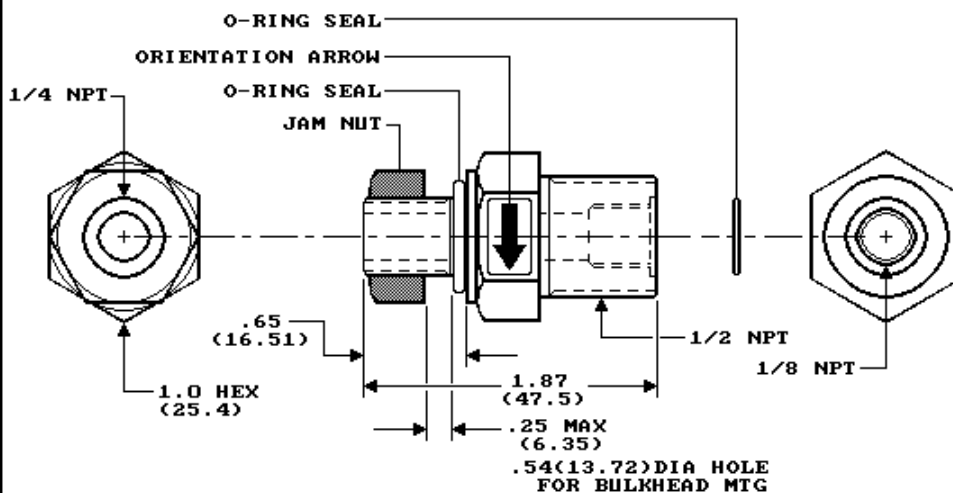


MOUNTS OUTSIDE->IN ON
1/2 NPT. OR INSIDE<-OUT
ON 1/4 NPT. OR THROUGH
BULKHEAD HOLE USING JAM
NUT.



EXTENDED STEM SET

10-710-□□-□□

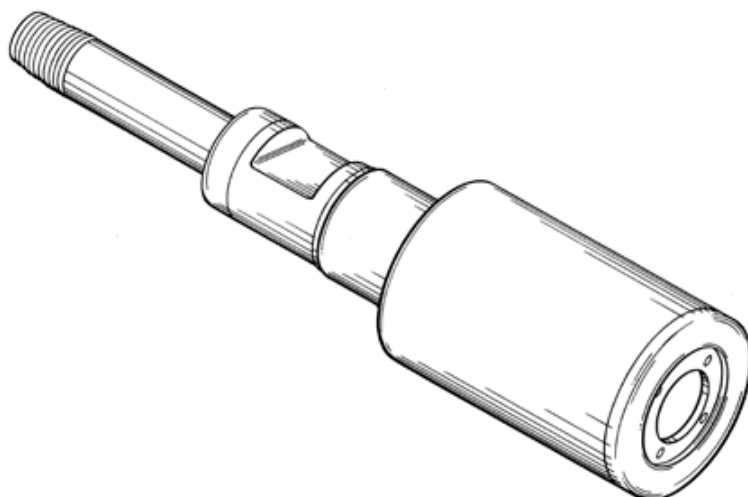

ORDER
FAX CLUMP # 810



EXTENDED STEM SET

TO REVERSE SWITCH ACTION,
ASSEMBLE FLOAT WITH MAGNETS
DOWN. SWITCH WILL CLOSE ON
RISING LIQUID LEVEL.

STEMS LONGER THAN 24" ARE NOT
STABLE STRUCTURES. CONSIDER
BRACKETS, SPACERS OR OTHER
STABILIZING HARDWARE.

DISCARD SLOSH SHIELD
IF NOT REQUIRED.

10-710-□□-□□

NL

SPECIFY DESIRED "NL"
DIMENSION IN 1"
INCREMENTS, FROM
1" TO 70".

1.77
(45.0)

.93
(23.62)

.125 MIN
(3.18)
REF

CLOSE

1.31 DIA
(33.32)


10-710-□□-□□
SET COMPONENTS

10-700-CS-□□	STR CONN
10-700-SS-□□	SLOSH SHD
10-715-□□-□□	NIPPLE



FITTING BRACKET

10-700-FB-□□




ORDER
FAX CLUMP # 811



FITTING BRACKET


10-700-FB-□□

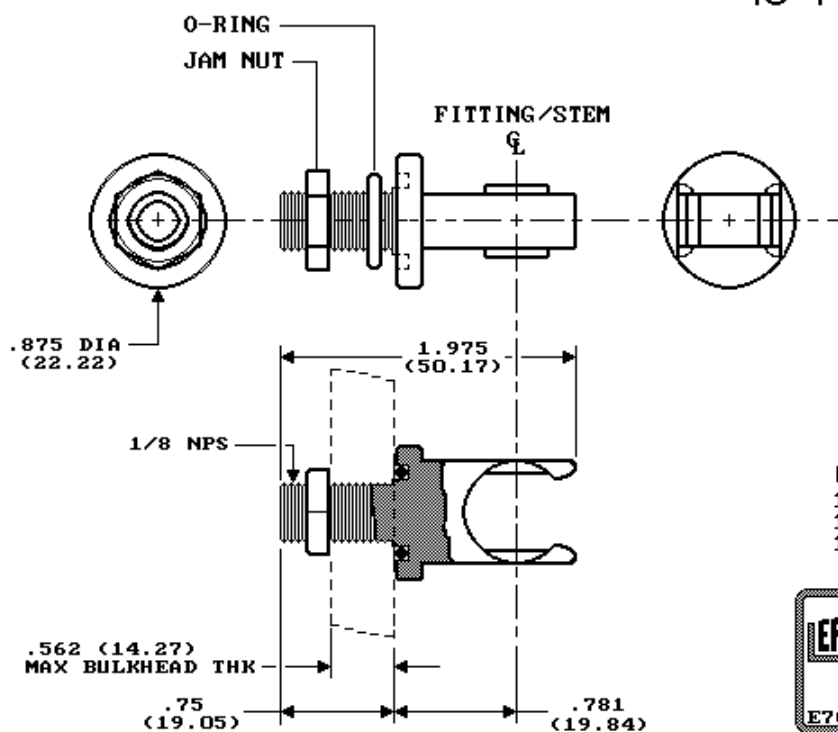

MATES WITH:
10-700-CA-XX
10-700-CS-XX
10-701-BH-XX



SPECIAL PURPOSE NIPPLES

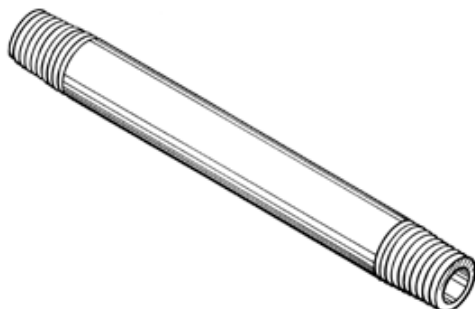10-714--

ORDER
FAX CLUMP # 812



SPECIAL PURPOSE NIPPLES


10-714--

LENGTH TABLE


CODE	LENGTH
A0	2.670
A1	2.875
A2	
A3	
A4	
A5	

MATERIAL OPTION
 PP = POLYPROPYLENE
 AC = ACETAL
 KR = KYNAR PUDF

SPECIFY LENGTH CODE

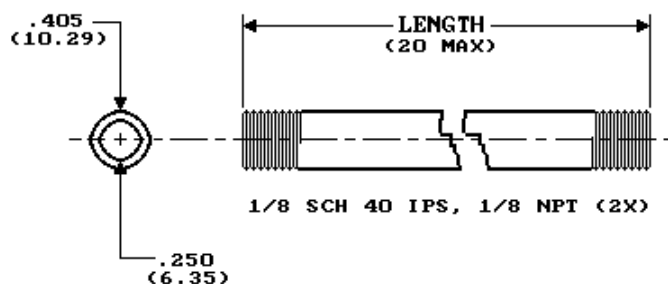

PRECISION NIPPLE

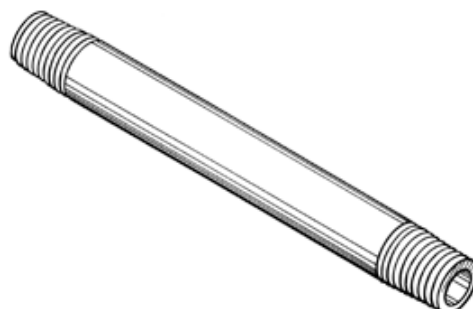10-715--

ORDER
FAX CLUMP # 813



PRECISION NIPPLE

10-715--


MATERIAL OPTION

PP = POLYPROPYLENE

AC = ACETAL

KR = KYNAR PUDF

LENGTH 1" INCREMENTS
1 TO 70"

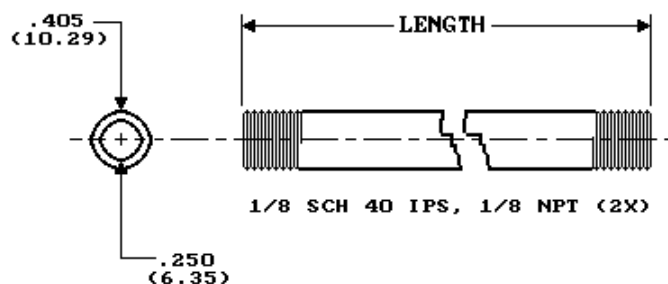


STRAIGHT CONNECTOR

10-700-CS-☐☐


ORDER
FAX CLUMP # 814



STRAIGHT CONNECTOR

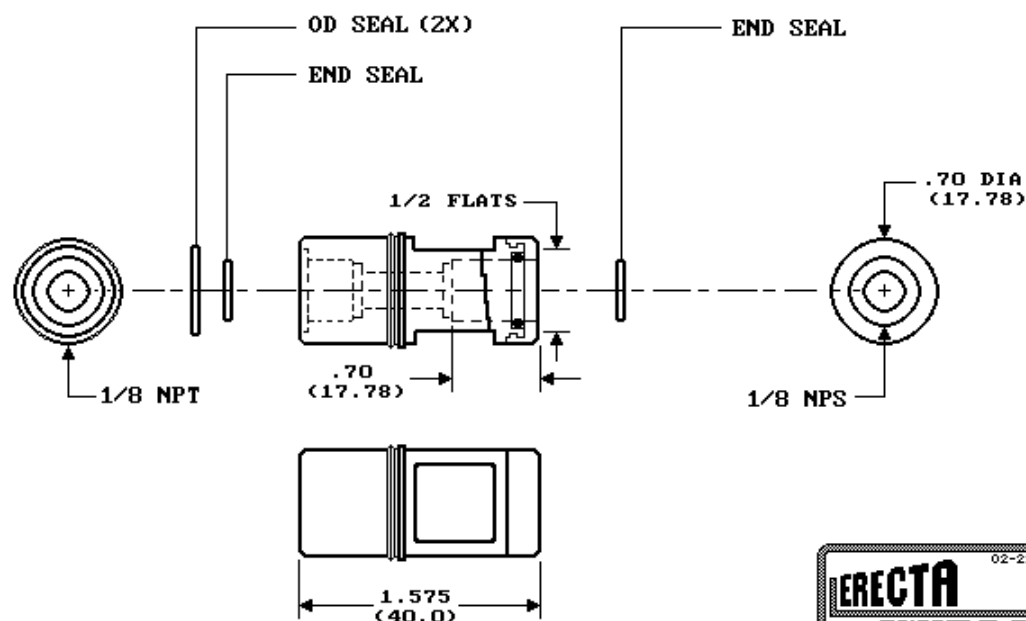10-700-CS-☐☐

SLOSH SHIELD

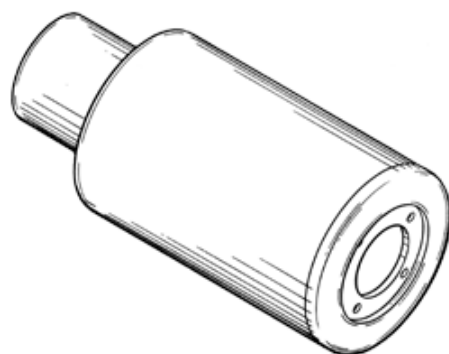10-700-SS-☐

ORDER
FAX CLUMP # 815



SLOSH SHIELD

10-700-SS-☐

.093 HOLES (8X)
(2.36)

2.48
(62.99)

.625 DIA
(15.87)

1.31 DIA
(33.32)


Ø SYM

MATES WITH: 10-700-CA-XX
10-700-CS-XX
10-701-BH-XX



LIQUID TIGHT STRAIN RELIEF CONNECTOR

10-700-WC




ORDER
FAX CLUMP # 816




LIQUID TIGHT STRAIN RELIEF CONNECTOR

10-700-WC-☐
 SELECT MATERIAL: ☐ NY (NYLON)
☐ KR (PUDF)

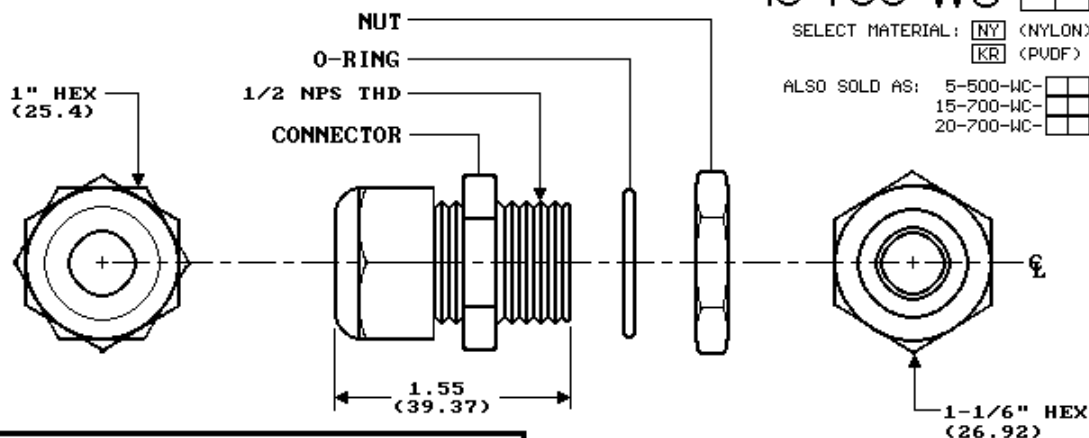
 ALSO SOLD AS: 5-500-WC-☐
 15-700-WC-☐
 20-700-WC-☐


CONNECTOR INSTALLED ON RECEPTACLE CAP

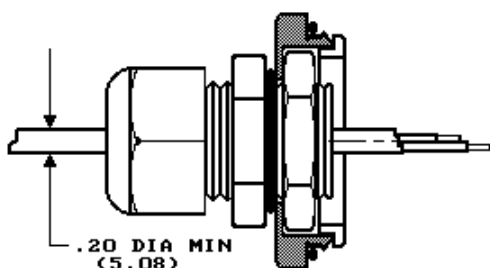
 INTERNAL SEAL:
 NYLON VERSION - BUNA-N
 PUDF VERSION - VITON


LIQUID TIGHT STRAIN RELIEF CONNECTOR

10-701-WC




ORDER
FAX CLUMP # 817




LIQUID TIGHT STRAIN RELIEF CONNECTOR

10-701-WC

ALSO SOLD AS: 5-701-WC
15-701-WC
20-701-WC

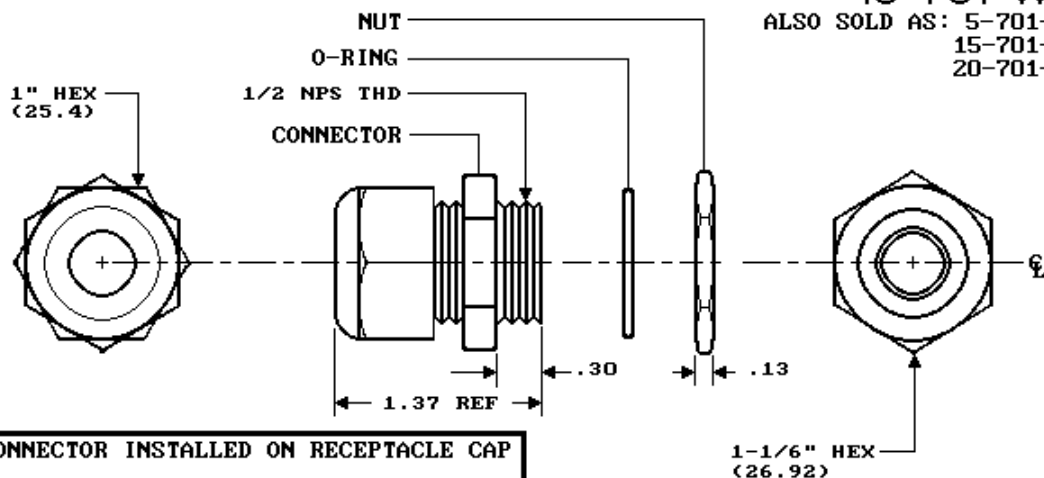

CONNECTOR INSTALLED ON RECEPTACLE CAP

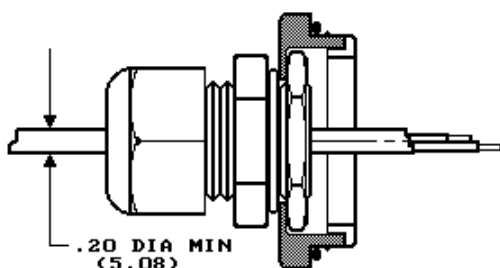


MATERIAL: NYLON




1-1/4 RECEPTACLE (1/8 NPT THD)

10-700-R□-□□



ORDER
FAX CLUMP # 818

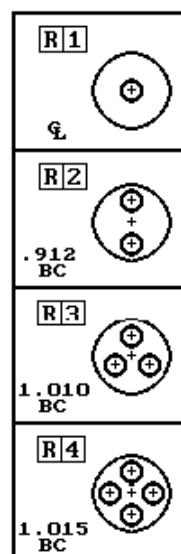

1-1/4 RECEPTACLE (1/8 NPT THD)

10-700-R□-□□

1/2 CONDUIT
KNOCKOUT

SEE 10-700-WC
LIQUID TIGHT
WIRING CONNECTOR




RECEPTACLE

O-RING

SNAP-ON CAP

1-1/4 NPT

1/8 NPT

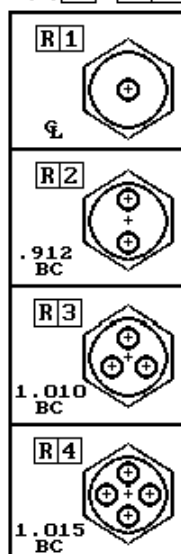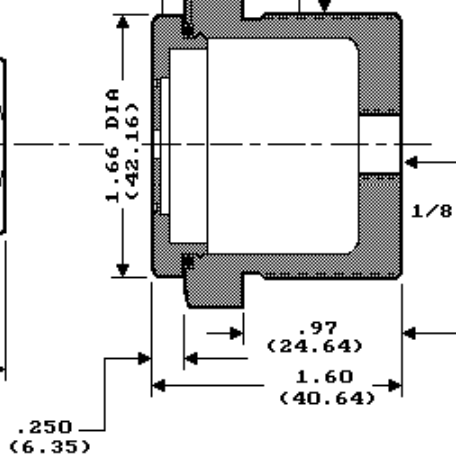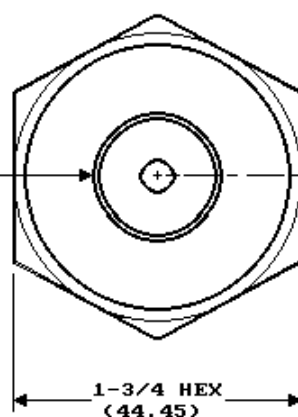


DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.

PRESSURE RATING - 100 PSI @ 20°C DERATE TO ZERO @ 90°C




RECEPTACLE (1/8 NPT THD)

10-701-R□-□□


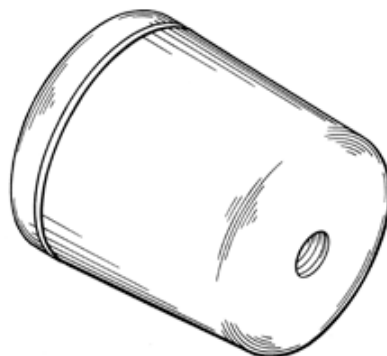


ORDER
FAX CLUMP # 819

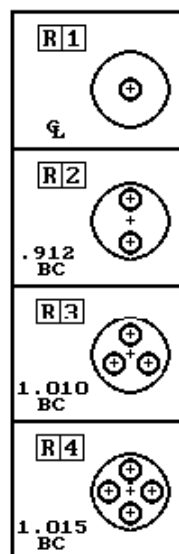

RECEPTACLE (1/8 NPT THD)

10-701-R□-□□

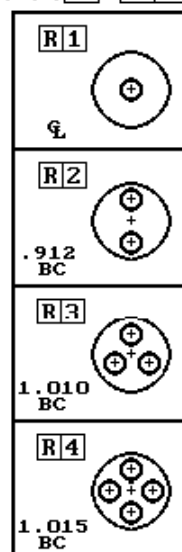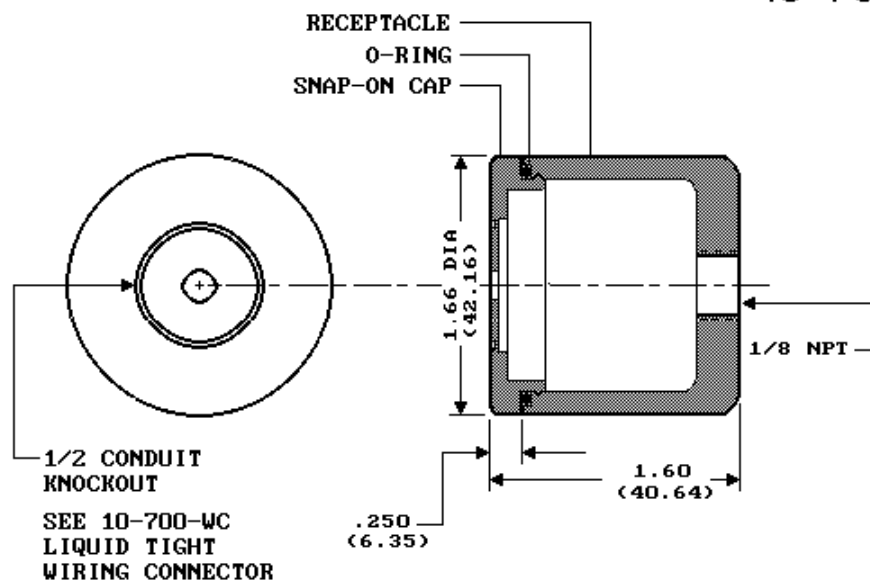


DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.




POP-IN RECEPTACLE (1/8 NPT THD)

10-702-R□-□□


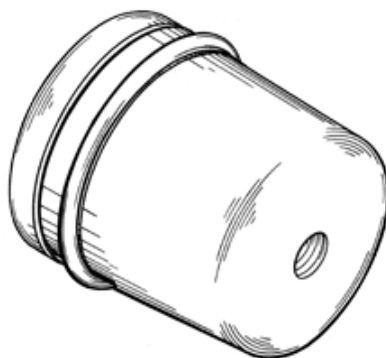


ORDER
FAX CLUMP # 820

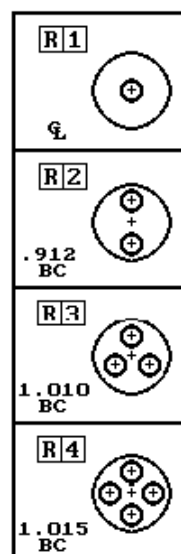


POP-IN RECEPTACLE (1/8 NPT THD)

10-702-R□-□□

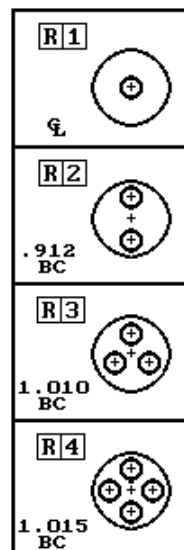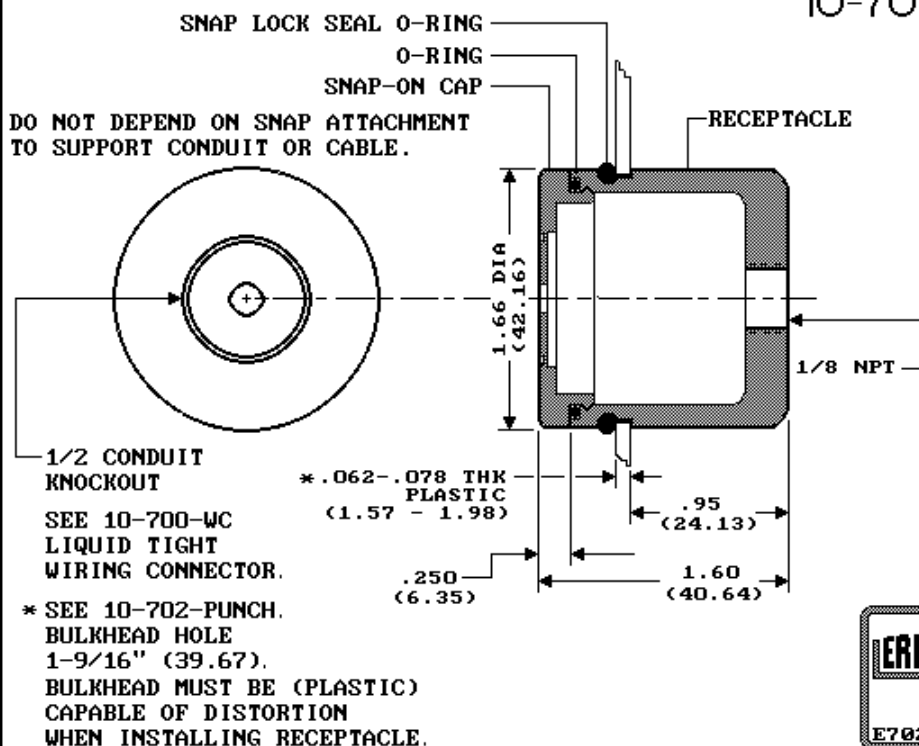

1-1/4 RECEPTACLE (BLIND)

10-700-RB-☐☐

ORDER
FAX CLUMP # 821



1-1/4 RECEPTACLE (BLIND)


10-700-RB-☐☐

1/2 CONDUIT
KNOCKOUT

SEE 10-700-WC
LIQUID TIGHT
WIRING CONNECTOR

RECEPTACLE
O-RING
SNAP-ON CAP

1-1/4 NPT

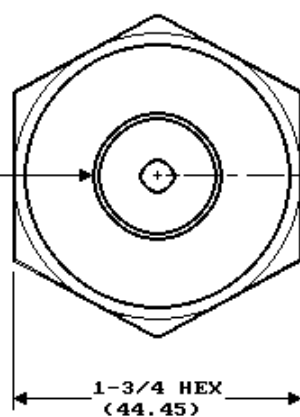

1-3/4 HEX
(44.45)

1.66 DIA
(42.16)

.97
(24.64)

1.60
(40.64)

.250
(6.35)

DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.

PRESSURE RATING - 100 PSI @ 20°C DERATE TO ZERO @ 90°C




RECEPTACLE (BLIND)

10-701-RB-☐☐

ORDER
FAX CLUMP # 822



RECEPTACLE (BLIND)

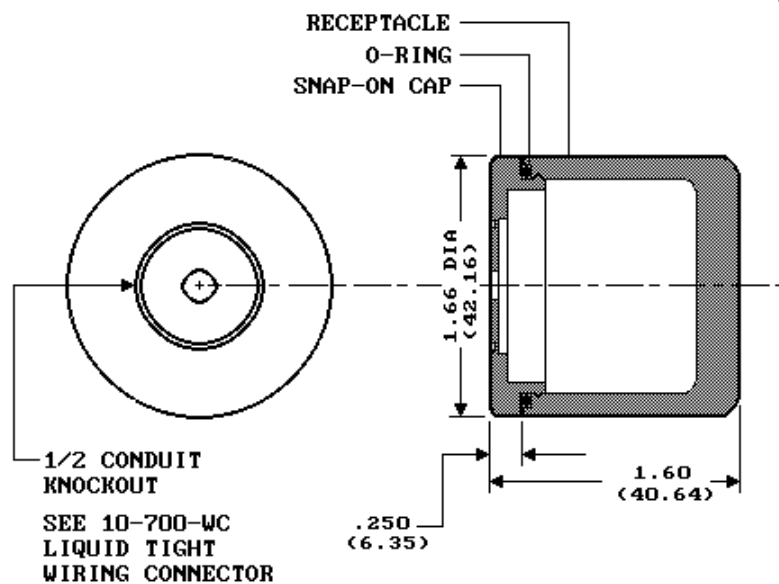10-701-RB-☐☐

DO NOT DEPEND ON SNAP ATTACHMENT
 TO SUPPORT CONDUIT OR CABLE.



POP-IN RECEPTACLE (BLIND)

10-702-RB-□□




ORDER
FAX CLUMP # 823




POP-IN RECEPTACLE (BLIND)

10-702-RB-□□

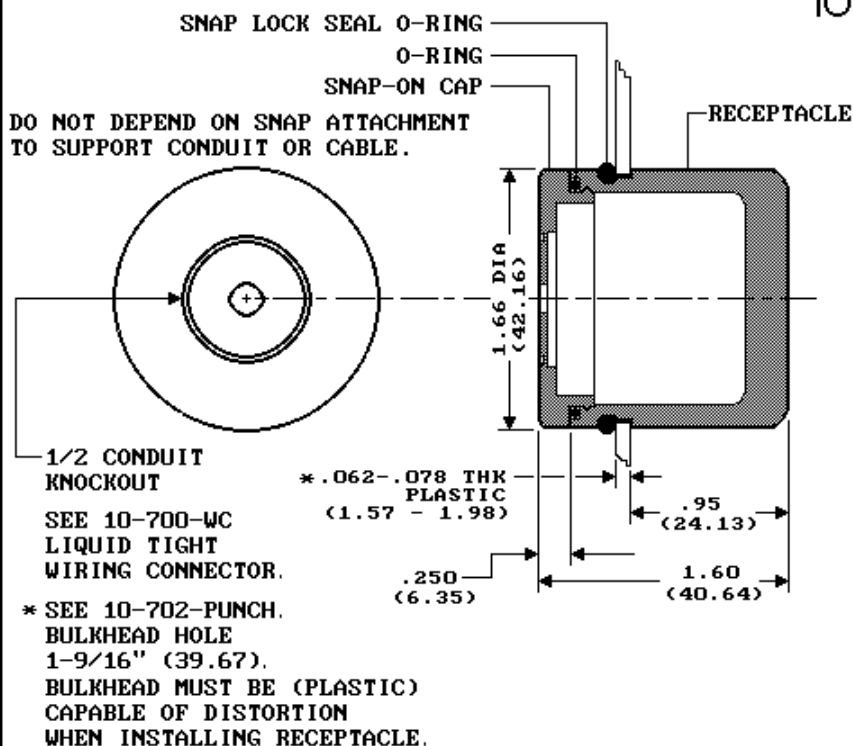

1-1/4 RECEPTACLE C'BORE + O-RING

10-700-RS-☐☐

ORDER
FAX CLUMP # 824



1-1/4 RECEPTACLE C'BORE + O-RING

10-700-RS-☐☐


1/2 CONDUIT
KNOCKOUT

SEE 10-700-WC
LIQUID TIGHT
WIRING CONNECTOR

RECEPTACLE
O-RING
SNAP-ON CAP

1-1/4 NPT

O-RING
FACE SEAL

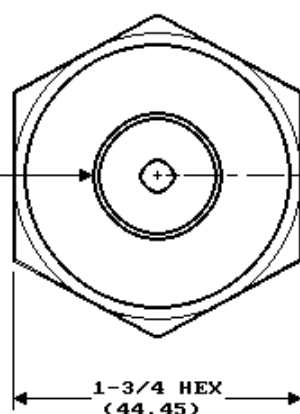

1-3/4 HEX
(44.45)

1.66 DIA
(42.16)

.550 DIA THRU
(13.97)
.75 DIA C' BORE
(19.05)
.08 DEEP
(2.03)

.97
(24.64)
1.60
(40.64)


.250
(6.35)

DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.

PRESSURE RATING - 100 PSI @ 20°C DERATE TO ZERO @ 90°C




RECEPTACLE C'BORE + O-RING

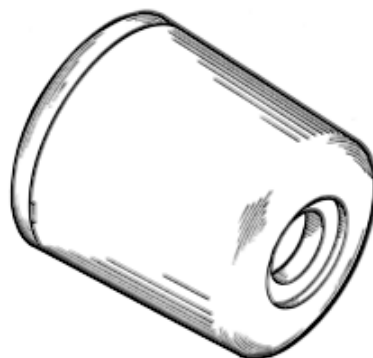10-701-RS-☐☐

ORDER
FAX CLUMP # 825




RECEPTACLE C'BORE + O-RING

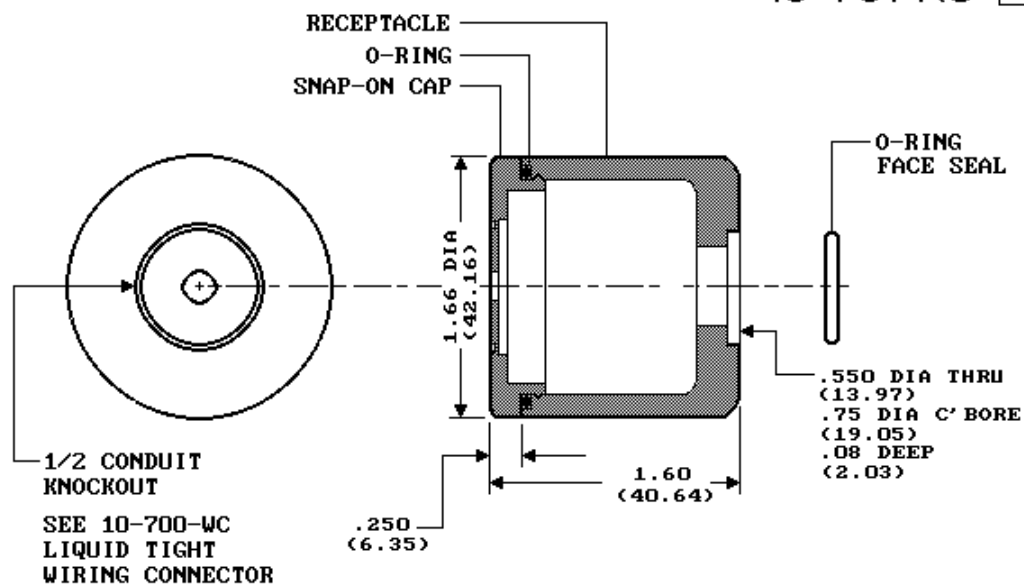10-701-RS-☐☐

DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.




POP-IN RECEPTACLE + O-RING

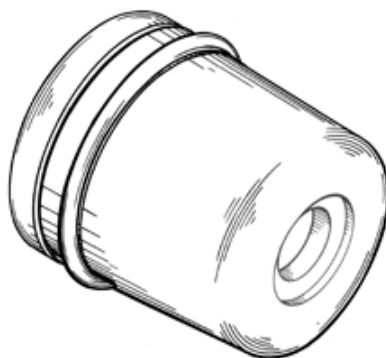10-702-RS-☐


ORDER
FAX CLUMP # 826



POP-IN RECEPTACLE + O-RING

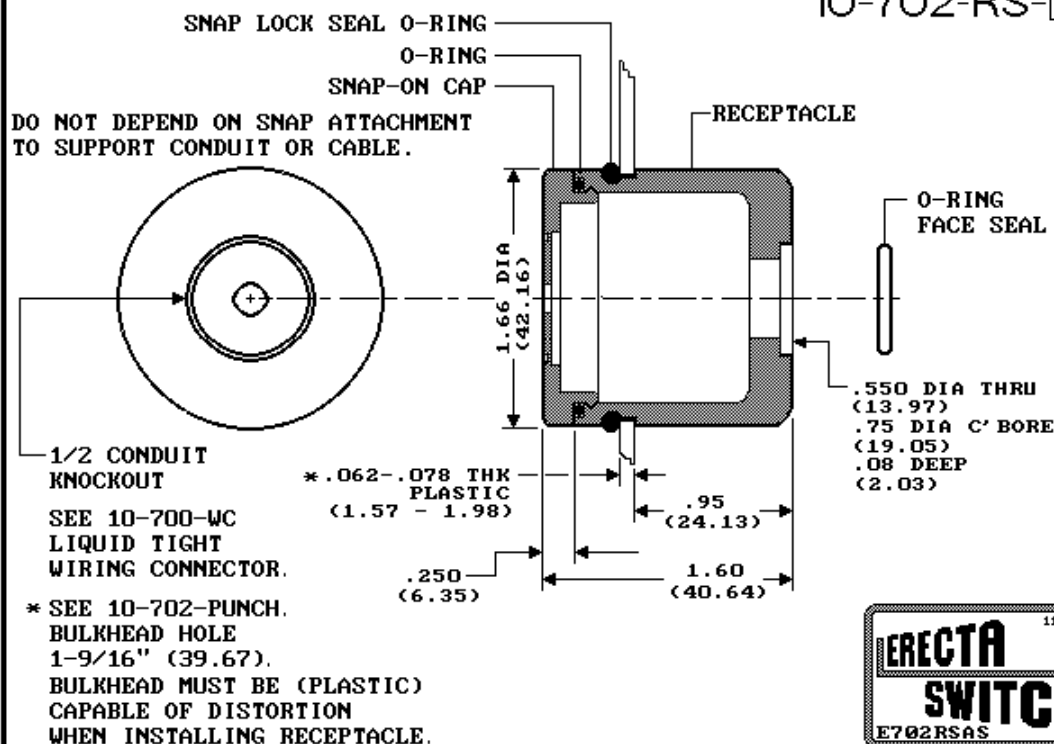10-702-RS-☐

1-1/4 RECEPTACLE C'BORE + O-RING 1/4 NPS

10-700-RT-☐☐

ORDER
FAX CLUMP # 827



1-1/4 RECEPTACLE C'BORE + O-RING 1/4 NPS

10-700-RT-☐☐

ALSO SOLD AS: 15-700-RT-☐☐
20-700-RT-☐☐


1/2 CONDUIT
KNOCKOUT

SEE 10-700-WC
LIQUID TIGHT
WIRING CONNECTOR

RECEPTACLE
O-RING
SNAP-ON CAP

1-1/4 NPT

O-RING
FACE SEAL

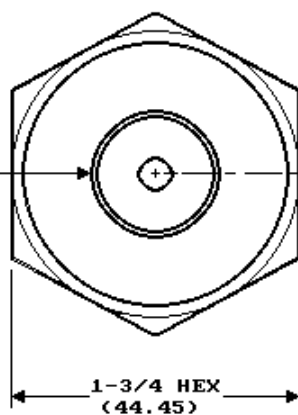

1-3/4 HEX
(44.45)

1.66 DIA
(42.16)

1/4 NPT THD
.75 DIA C' BORE
(19.05)
.08 DEEP
(2.03)

.97
(24.64)
1.60
(40.64)


.250
(6.35)

DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.

PRESSURE RATING - 100 PSI @ 20°C DERATE TO ZERO @ 90°C



RECEPTACLE C'BORE + O-RING 1/4 NPS

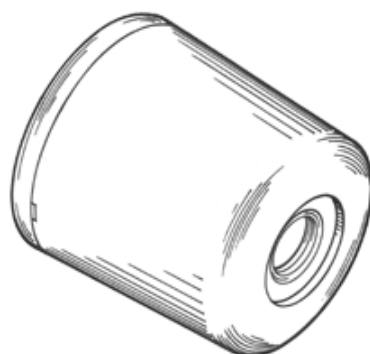10-701-RT-☐☐


ORDER
FAX CLUMP # 828



RECEPTACLE C'BORE + O-RING 1/4 NPS

10-701-RT-☐☐

ALSO SOLD AS : 15-701-RT-☐☐
20-701-RT-☐☐

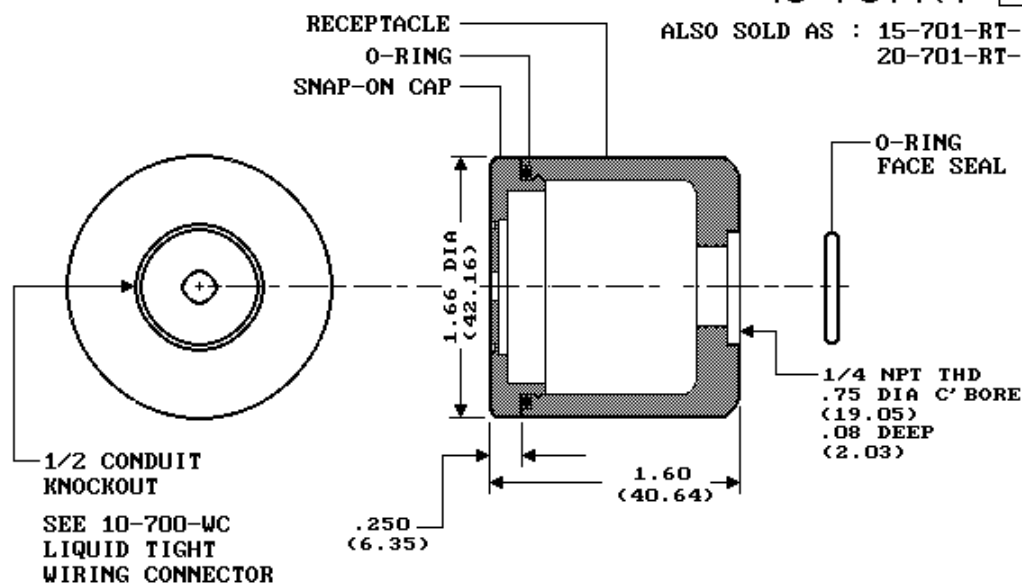


DO NOT DEPEND ON SNAP ATTACHMENT
TO SUPPORT CONDUIT OR CABLE.



POP-IN RECEPTACLE + O-RING 1/4 NPS

10-702-RT-□□

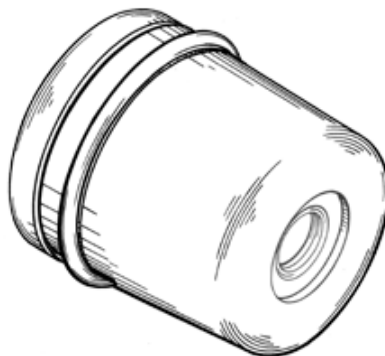


ORDER
FAX CLUMP # 829




POP-IN RECEPTACLE + O-RING 1/4 NPS

10-702-RT-□□

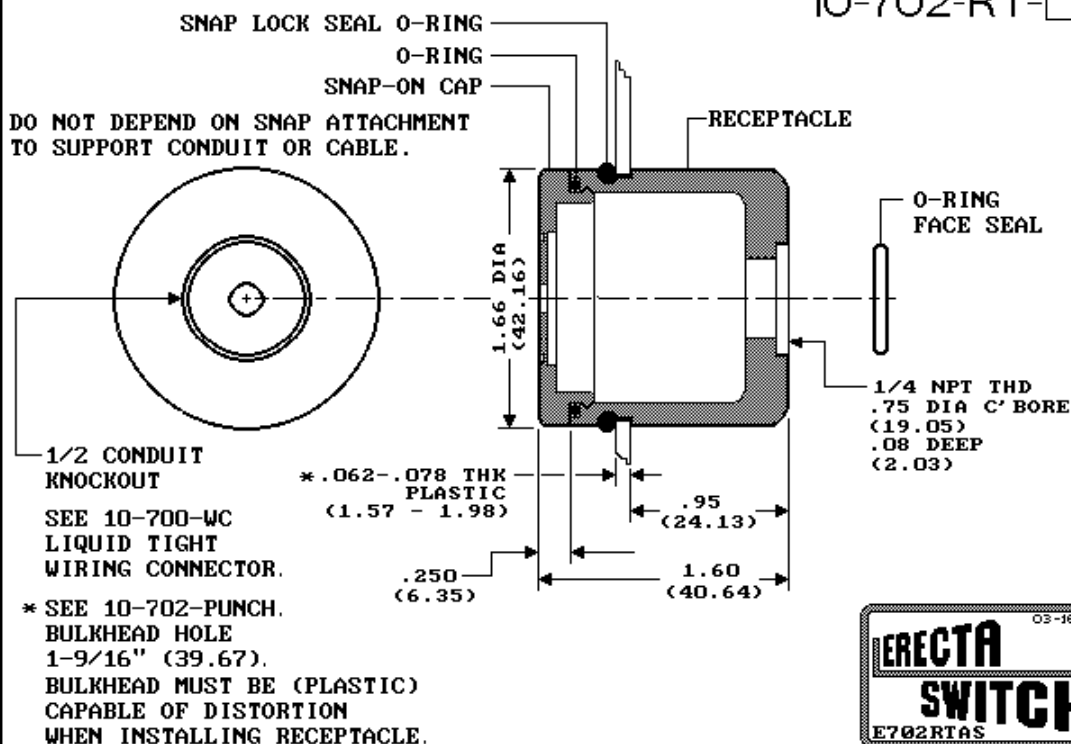


1-1/4 RECEPT - ONE SWITCH + 3/8 TUBE

10-700-RM-☐


ORDER
FAX CLUMP # 830



1-1/4 RECEPT - ONE SWITCH + 3/8 TUBE

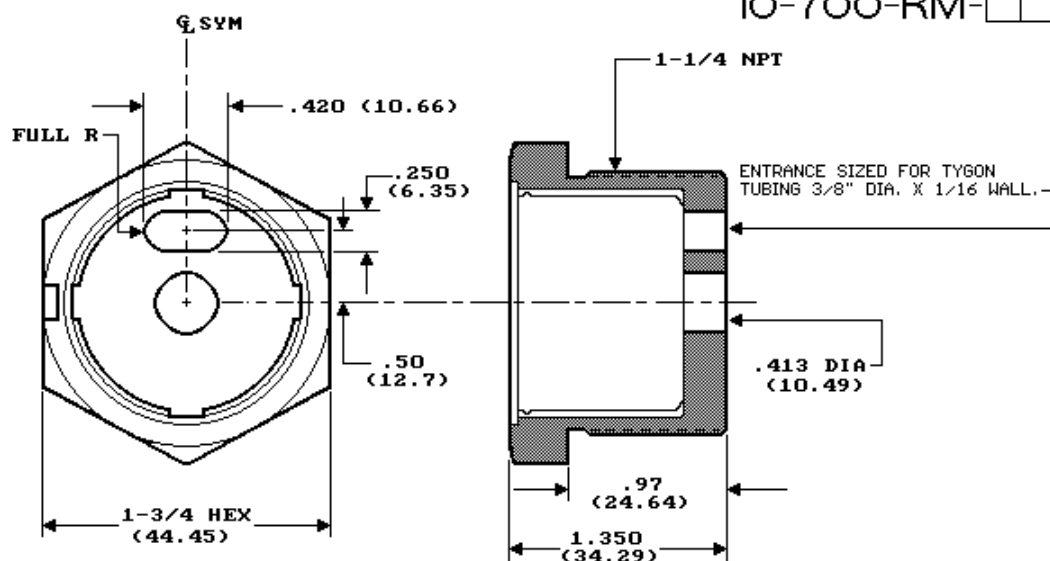10-700-RM-☐


1-1/4 RECEPT

10-701-RM-☐


ORDER
FAX CLUMP # 831



1-1/4 RECEPT

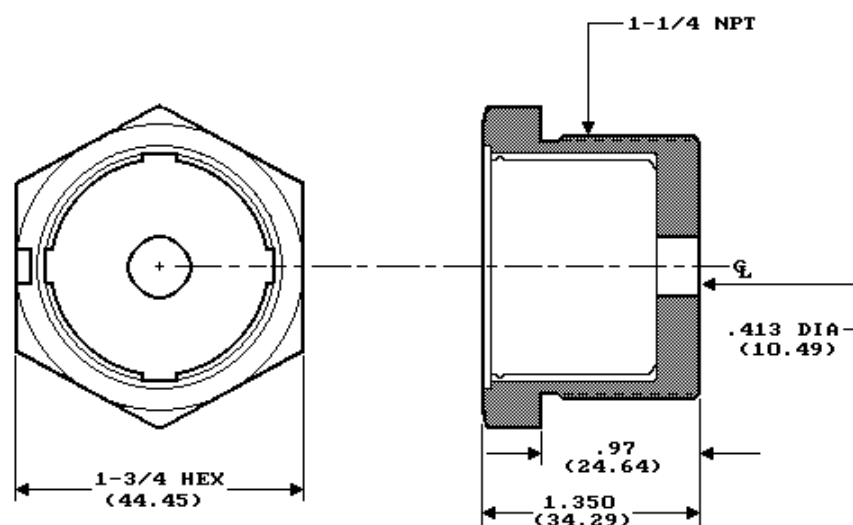10-701-RM-☐


POP-IN RECEPT - ONE SWITCH + 3/8 TUBE

10-702-RM-☐


ORDER
FAX CLUMP # 832



POP-IN RECEPT - ONE SWITCH + 3/8 TUBE

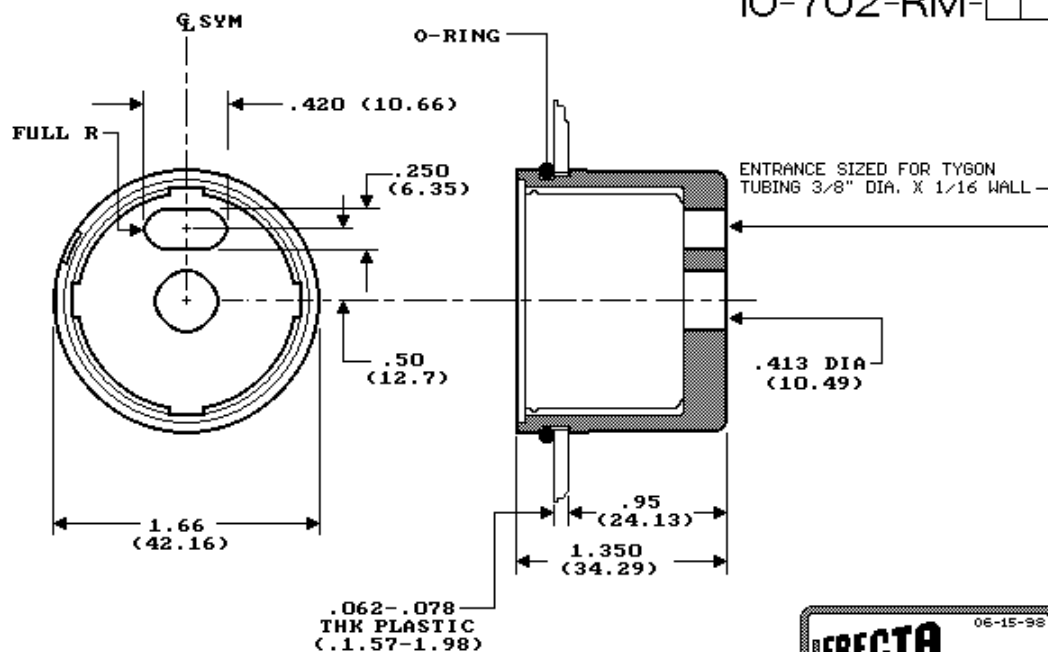10-702-RM-☐


1-1/4 RECEPTACLE (1/8 NPT THD)

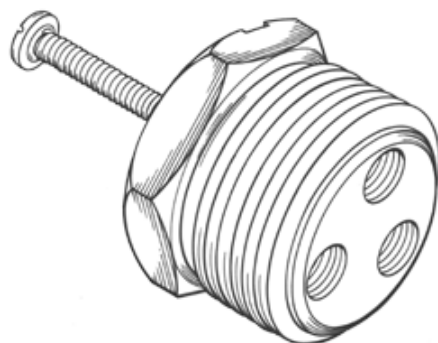10-703-RM-☐☐


ORDER
FAX CLUMP # 833



1-1/4 RECEPTACLE (1/8 NPT THD)

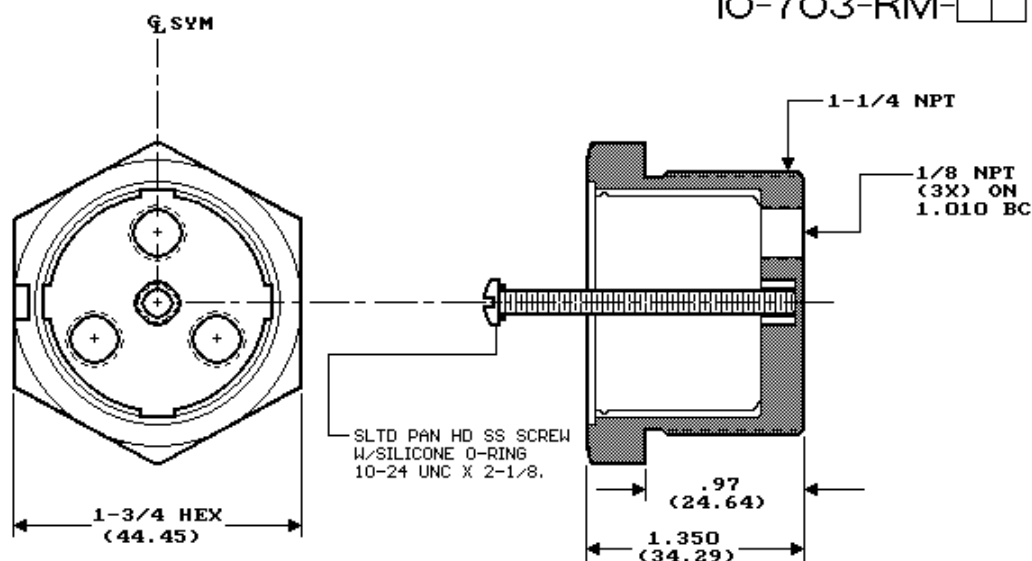10-703-RM-☐☐

Q BRACKET RECEPT, O-RING 1/4 NPS

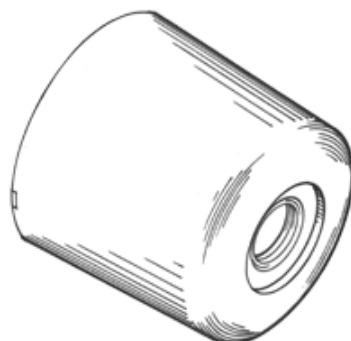10-704-RM-☐


ORDER
FAX CLUMP # 834




Q BRACKET RECEPT, O-RING 1/4 NPS

10-704-RM-☐

ALSO SOLD AS : 15-704-RM-☐
20-704-RM-☐

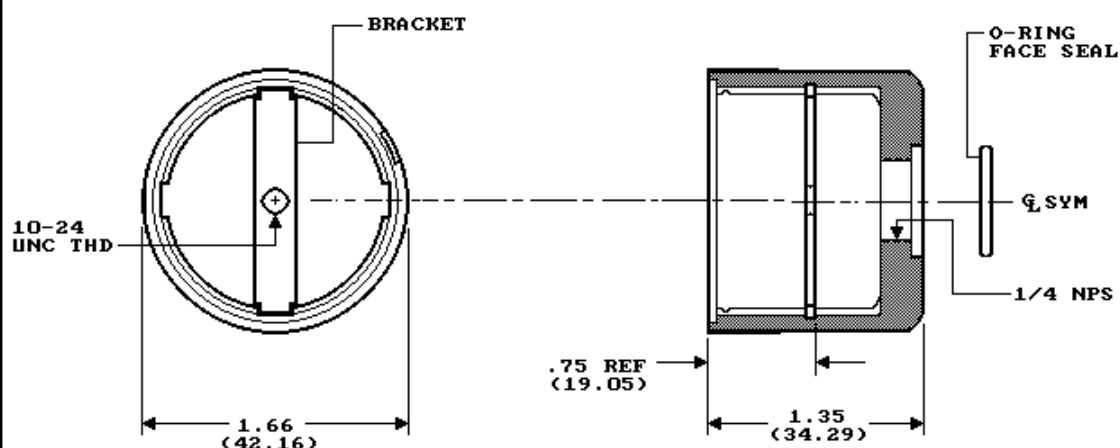

BRACKET 1-1/4 RECEPT, O-RING 1/4 NPS

10-705-RM-☐


ORDER
FAX CLUMP # 835



BRACKET 1-1/4 RECEPT, O-RING 1/4 NPS


10-705-RM-☐

ALSO SOLD AS : 15-705-RM-☐
20-705-RM-☐

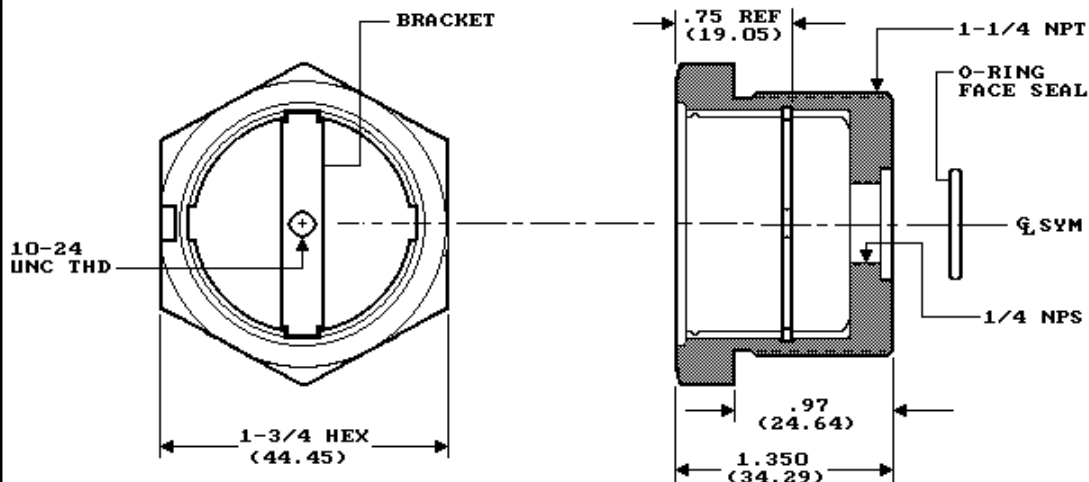

RECEPTACLE (MID SECTION)

10-701-SM-PP

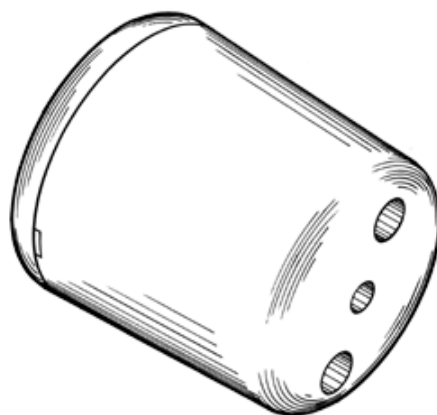


ORDER
FAX CLUMP # 836




RECEPTACLE (MID SECTION)

10-701-SM-PP

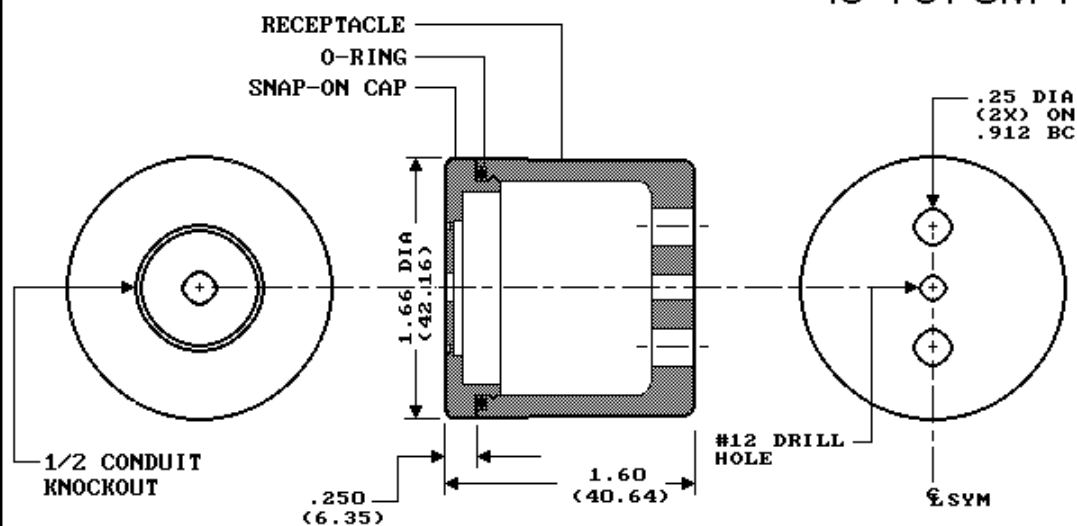

RECEPTACLE (MID SECTION)

10-702-SM-PP

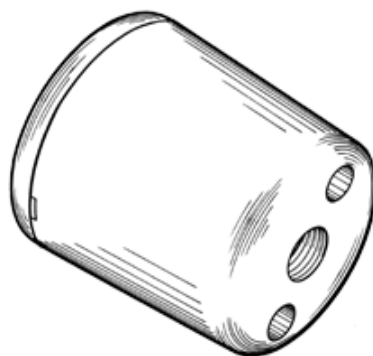


ORDER
FAX CLUMP # 837




RECEPTACLE (MID SECTION)

10-702-SM-PP

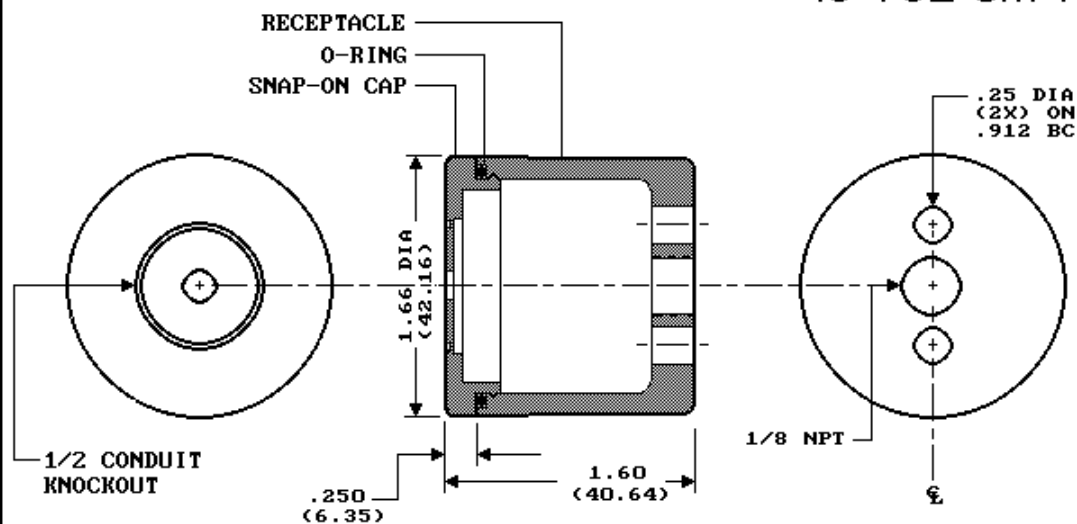

RECEPTACLE MID SECTION W/1/4 NPT NIPPLE

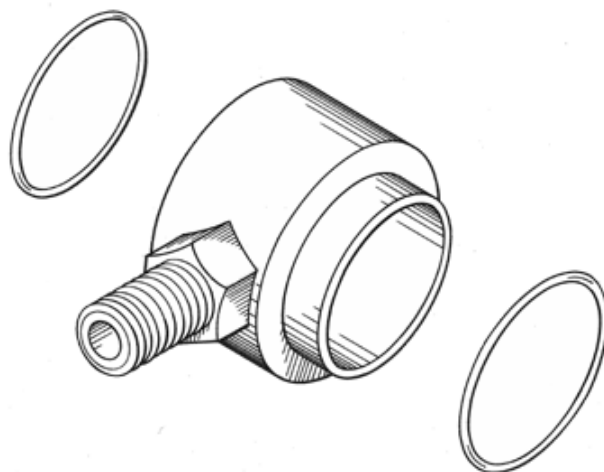10-700-MS-☐☐


ORDER
FAX CLUMP # 838



RECEPTACLE MID SECTION W/1/4 NPT NIPPLE

10-700-MS-☐☐


ALSO SOLD AS: 15-700-MS-☐☐
20-700-MS-☐☐

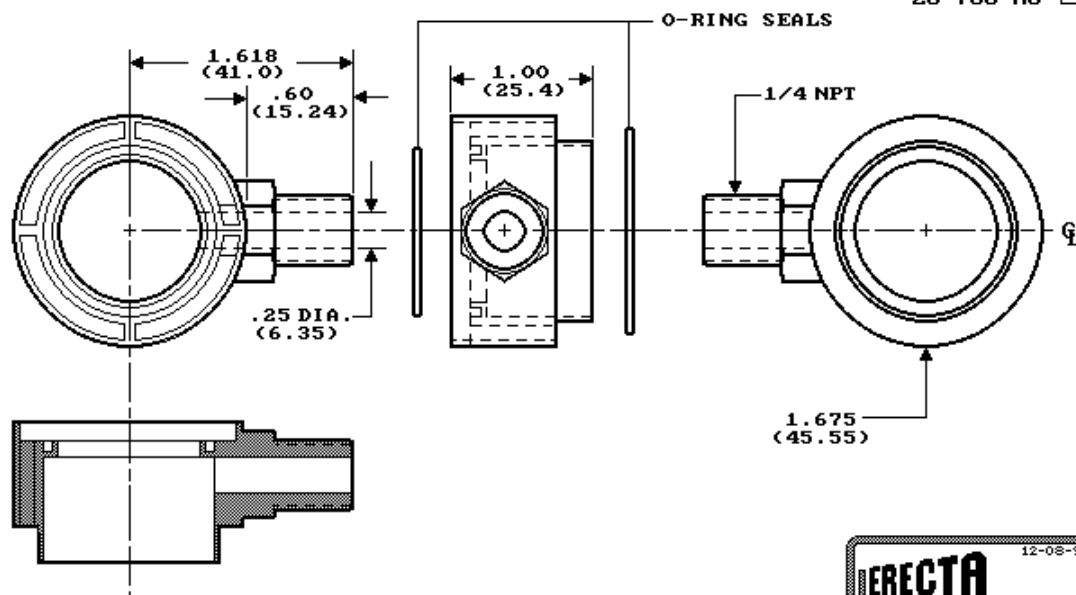

MATES WITH 1-1/4" RECEPTACLES.
PRESSURE RATING - 50 PSI @ 20°C. DERATE TO ZERO @ 90°C..



CAP & SEALED SCREW (MID SECTION)

10-702-CM-☐☐


ORDER
FAX CLUMP # 839




CAP & SEALED SCREW (MID SECTION)

10-702-CM-☐☐

ALSO SOLD AS : 15-702-CM-☐☐
20-702-CM-☐☐

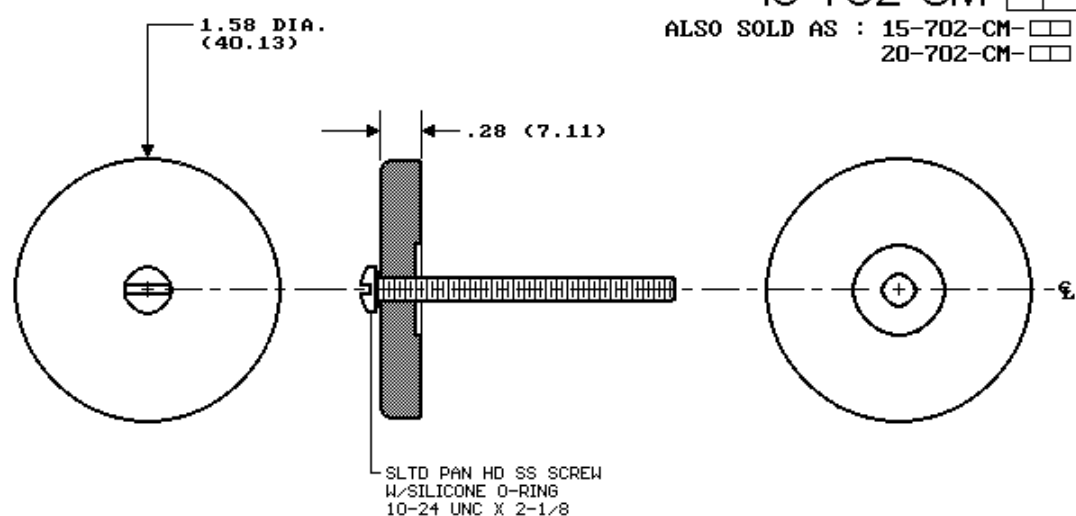NOTE: CAP & SCREW USED WITH 10-700-MS-☐☐

CAP & SEALED SCREW (MID SECTION)

10-703-CM-☐☐


ORDER
FAX CLUMP # 840



CAP & SEALED SCREW (MID SECTION)


10-703-CM-☐☐

ALSO SOLD AS : 15-703-CM-☐☐
20-703-CM-☐☐

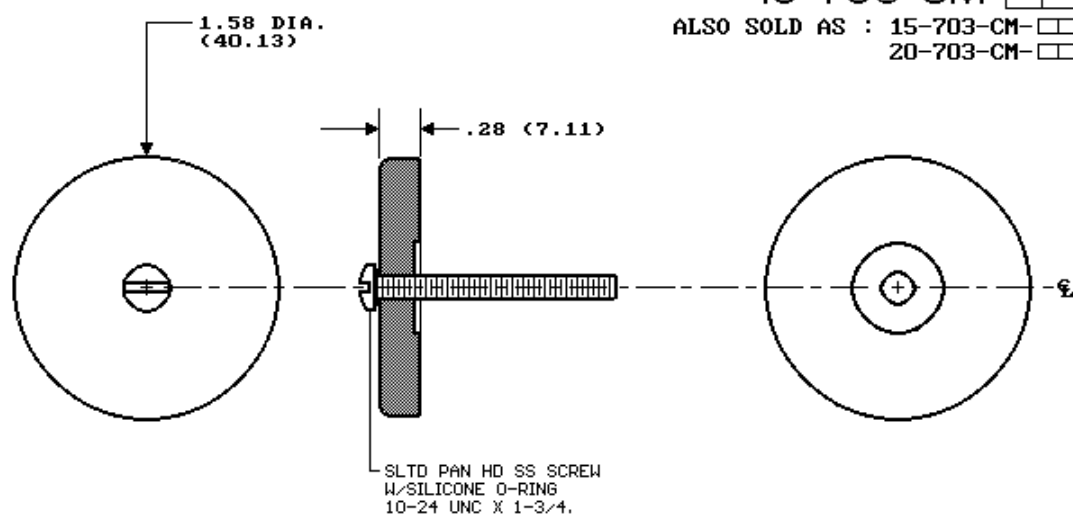
NOTE: CAP & SCREW USED WITH 10-700-MS-☐☐

1-1/4 RELAY HSG (1/8 NPT THD)

10-701-H


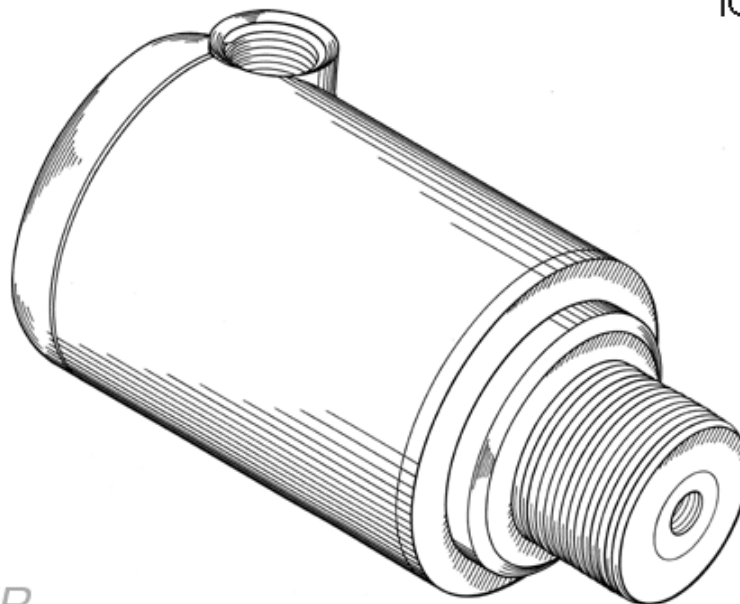


ORDER
FAX CLUMP # 841

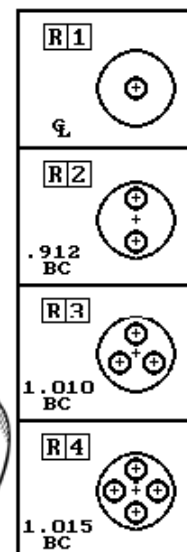


1-1/4 RELAY HSG (1/8 NPT THD)

10-701-H

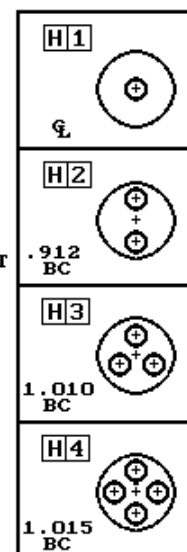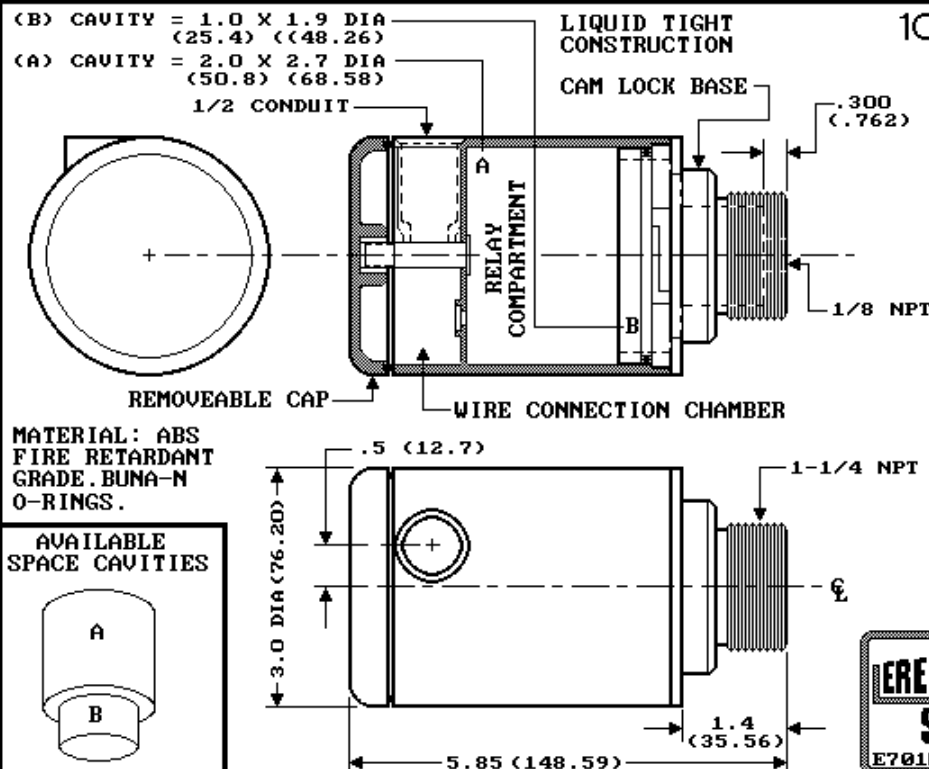

1-1/4 RELAY HSG (BLIND)

10-701-HB

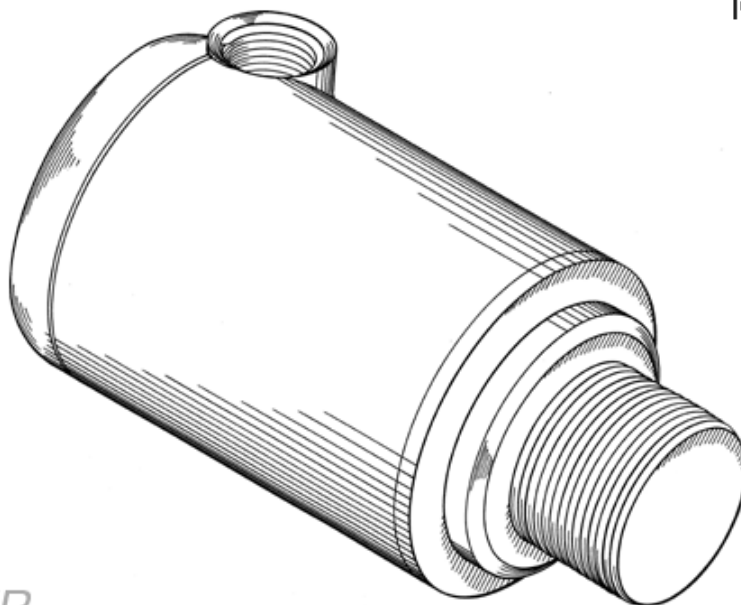


ORDER
FAX CLUMP # 842




1-1/4 RELAY HSG (BLIND)

10-701-HB

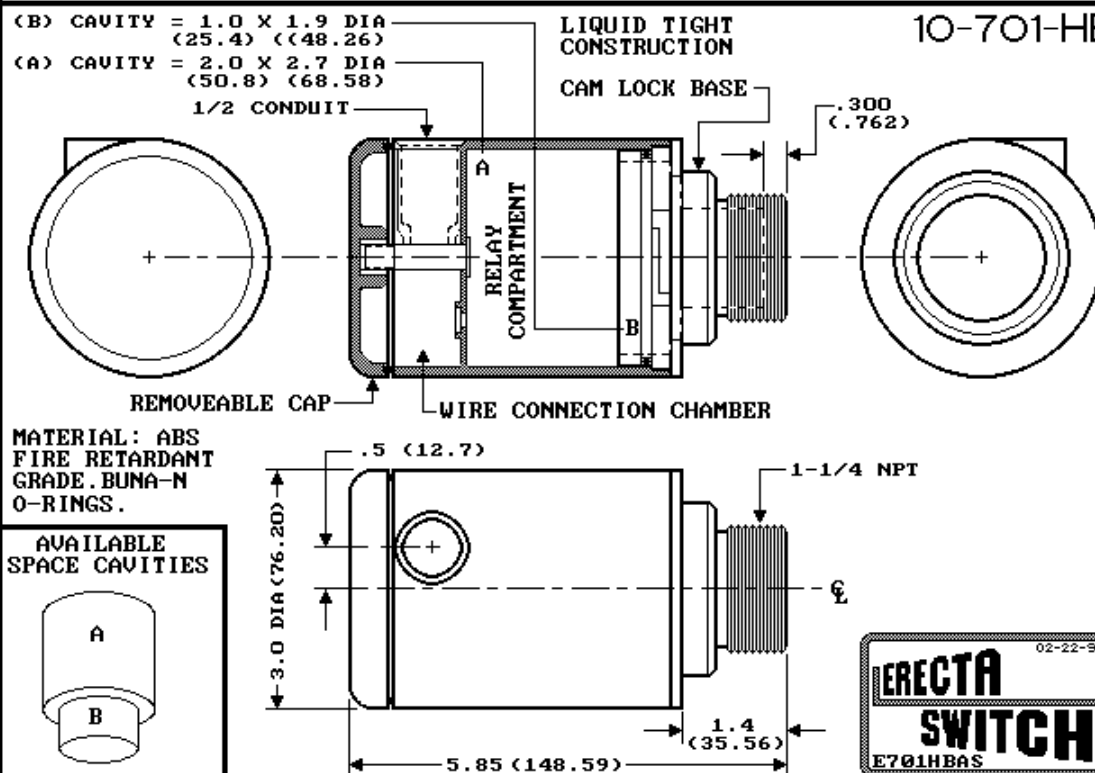

1-1/4 RELAY HSG C'BORE + O-RING

10-701-HS

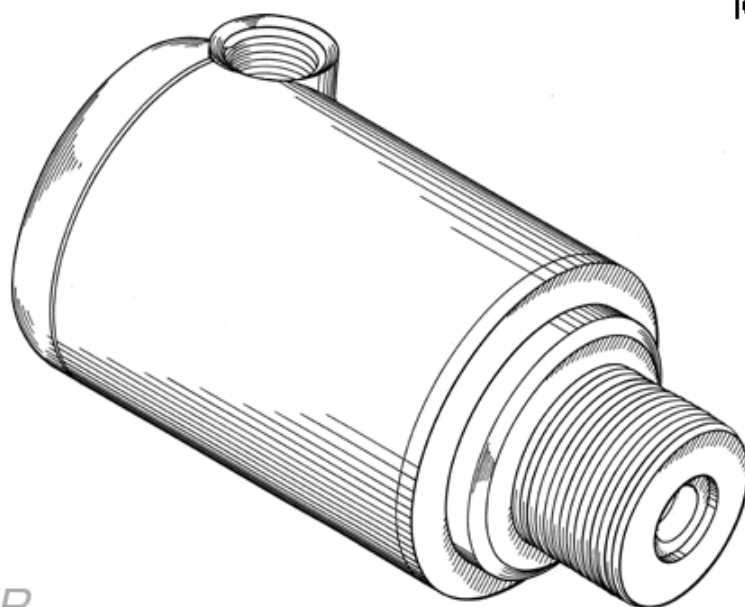


ORDER
FAX CLUMP # 843




1-1/4 RELAY HSG C'BORE + O-RING

10-701-HS

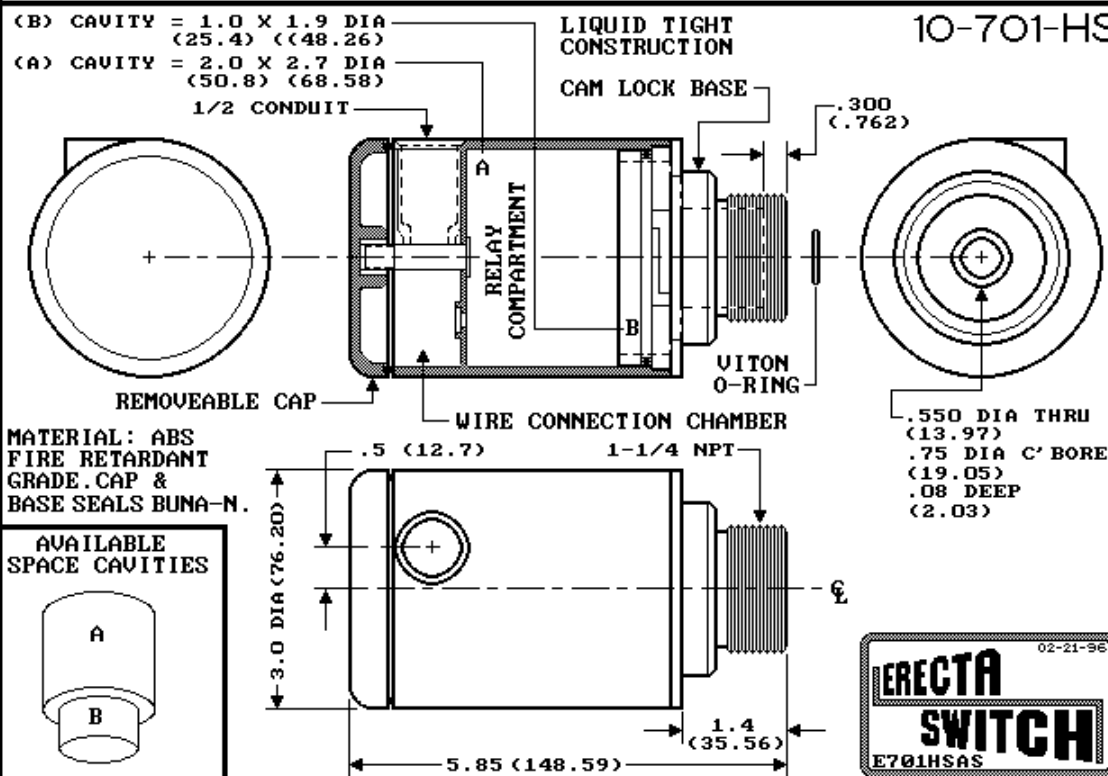

1-1/4 RELAY HSG C'BORE + O-RING 1/4 NPS

10-701-HT

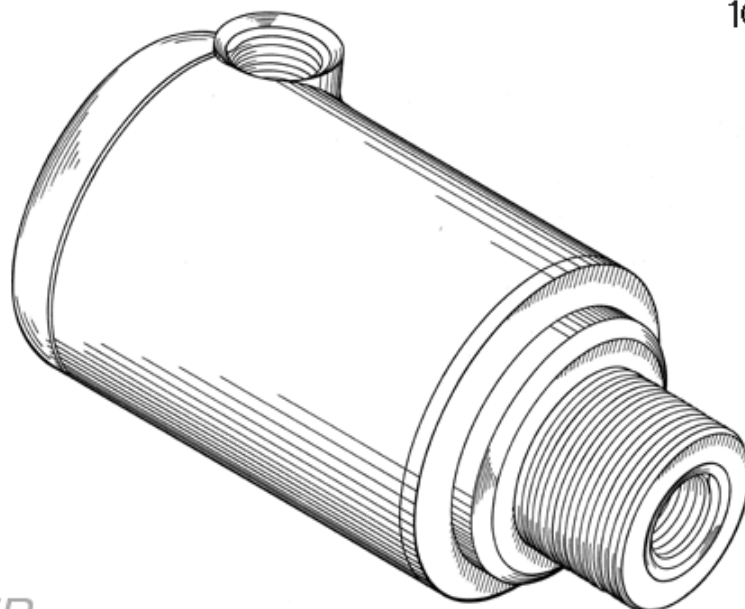


ORDER
FAX CLUMP # 844



1-1/4 RELAY HSG C'BORE + O-RING 1/4 NPS

10-701-HT

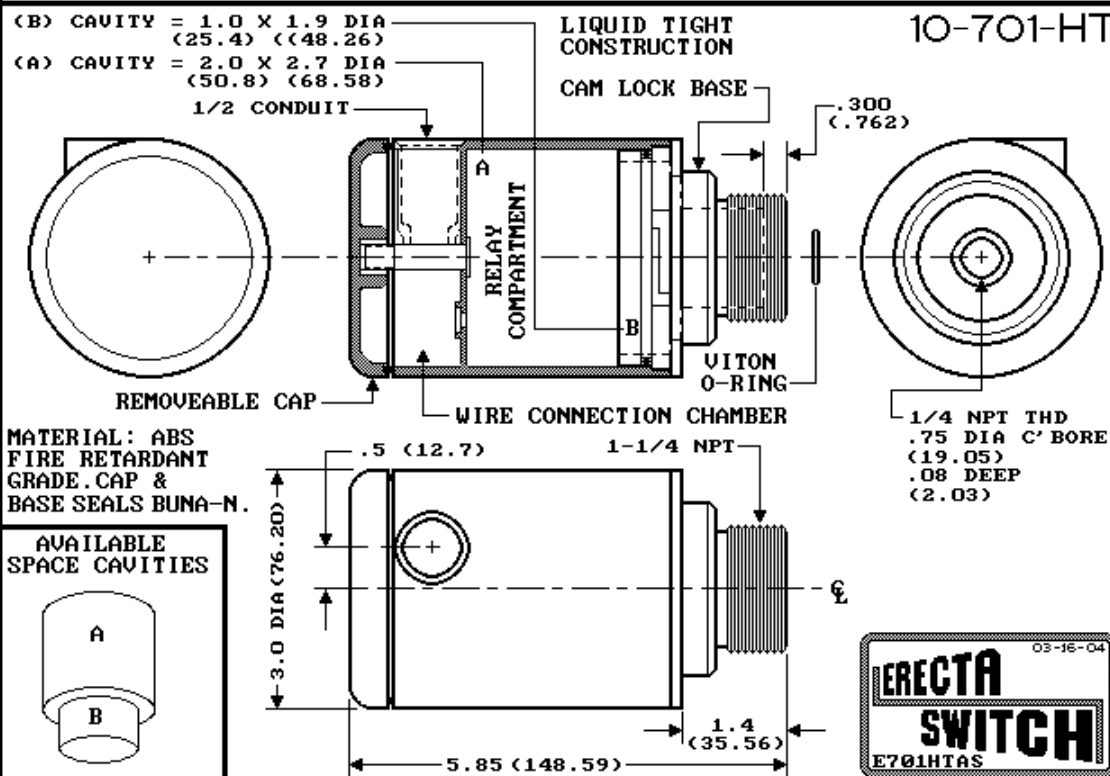

1/8 NPT PLUG

10-700-PG




ORDER
FAX CLUMP # 845



1/8 NPT PLUG


10-700-PG

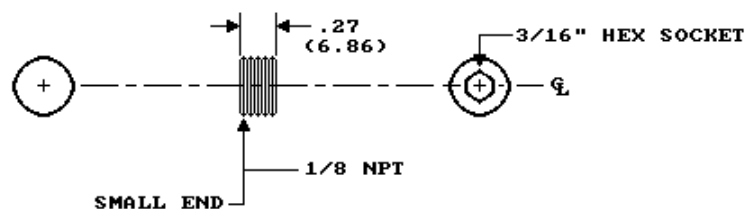

MATERIAL: ACETAL (NAT WHITE)




2 HOLE SPACER (SUPPORT)

10-700-S2-☐

ORDER
FAX CLUMP # 846



2 HOLE SPACER (SUPPORT)

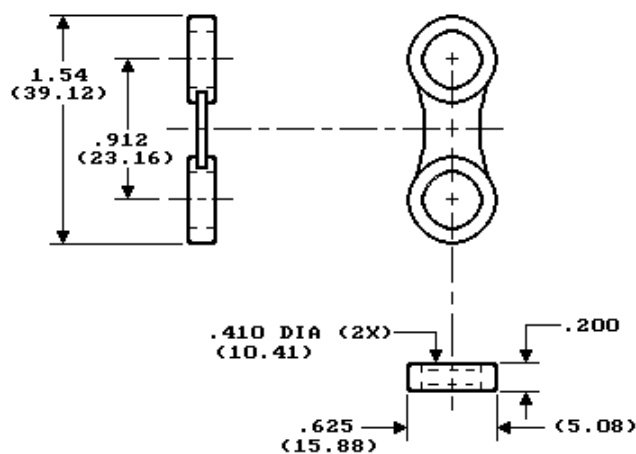10-700-S2-☐


3 HOLE SPACER (SUPPORT)

10-700-S3-☐☐

ORDER
FAX CLUMP # 847



3 HOLE SPACER (SUPPORT)

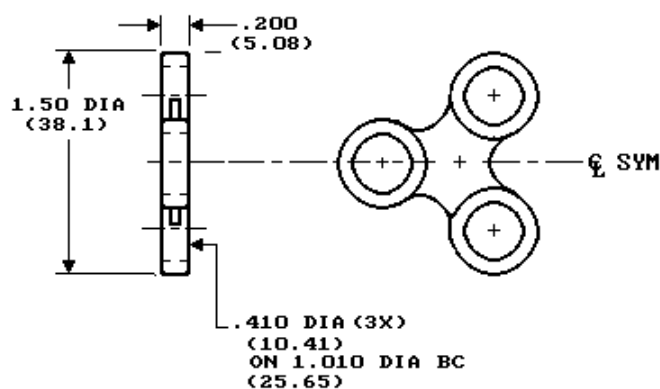10-700-S3-☐☐


4 HOLE SPACER (SUPPORT)

10-700-S4-☐


ORDER
FAX CLUMP # 848



4 HOLE SPACER (SUPPORT)

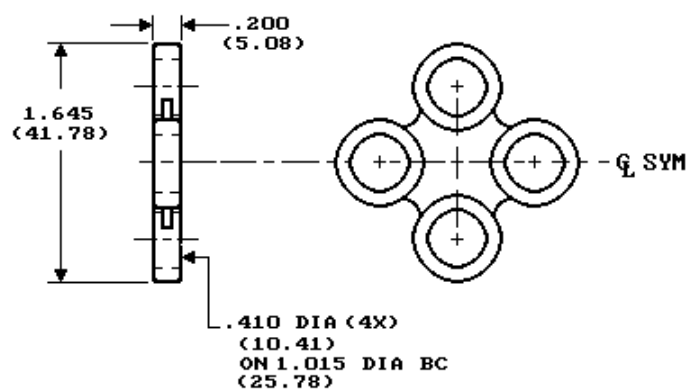10-700-S4-☐

SPACER

10-700-SP-☐☐


ORDER
FAX CLUMP # 849



SPACER

10-700-SP-☐☐

ALSO SOLD AS: 15-700-SP-☐☐
20-700-SP-☐☐

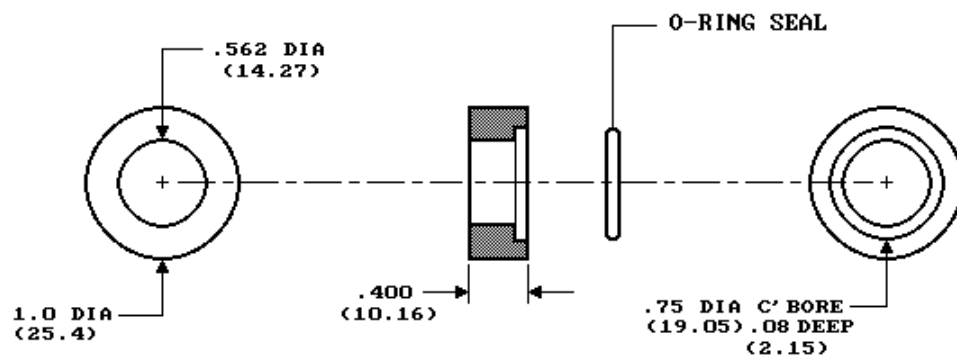

1/4 HEX JAM NUT

10-700-N4




ORDER
FAX CLUMP # 850



1/4 HEX JAM NUT

10-700-N4

ALSO SOLD AS : 15-700-N4
20-700-N4

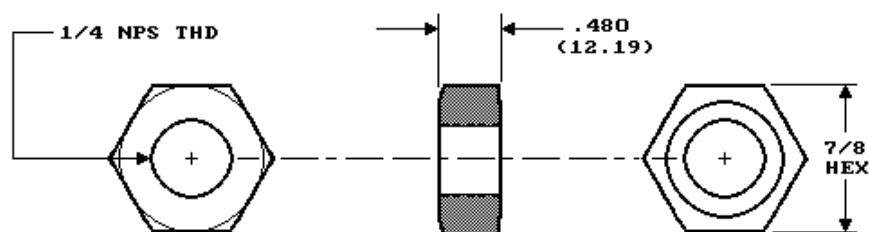

MATERIAL: POLYPROPYLENE, BLACK



1/4 HEX JAM NUT

10-701-N4




ORDER
FAX CLUMP # 851



1/4 HEX JAM NUT

10-701-N4

ALSO SOLD AS : 15-701-N4
20-701-N4

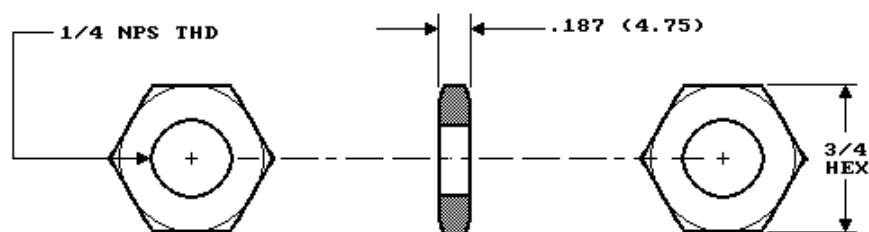

MATERIAL: NYLON, NATURAL



1/8 HEX JAM NUT

10-700-N8




ORDER
FAX CLUMP # 852



1/8 HEX JAM NUT

10-700-N8

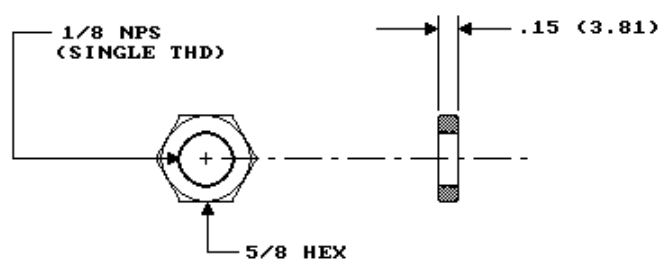

MATERIAL: POLYPROPYLENE, BLACK



1/8 HEX JAM NUT

10-701-N8




ORDER
FAX CLUMP # 853



1/8 HEX JAM NUT

10-701-N8

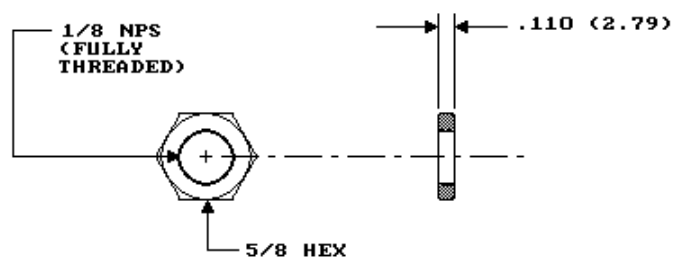

MATERIAL: NYLON, NATURAL




RETAINING RING

10-700-RR-☐☐

ORDER
FAX CLUMP # 854



RETAINING RING

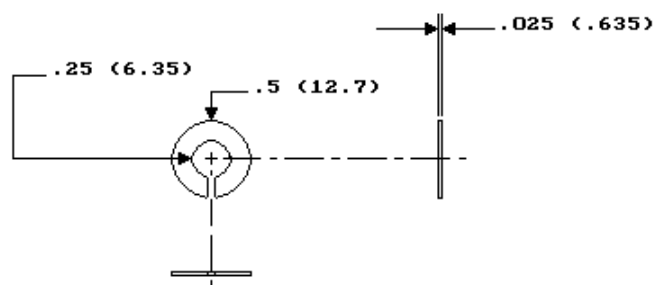10-700-RR-☐☐

O-RING SEAL

10-700-O-

ORDER
FAX CLUMP # 855




O-RING SEAL

10-700-O-

SIZE, SEE TABLE


ALSO SOLD AS : 5-700-O-
15-700-O-
20-700-O-

SIZE	OD	SECTION	MATERIAL
009	.349	.070	VITON
012	.506	.070	VITON
019	.946	.070	VITON
024	1.254	.070	VITON
026	1.384	.070	VITON
110	.572	.104	VITON
111	.635	.104	VITON
113	.760	.104	VITON
117	1.012	.104	VITON
128	1.704	.104	VITON
139	2.396	.104	VITON
141	2.522	.104	VITON
145	2.773	.104	BUNA N
148	2.961	.104	BUNA N
222	1.773	.140	EPR
231	2.905	.140	EPR

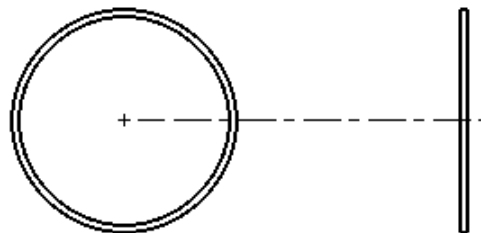

6 CONDUCTOR CABLE ASSY

10-72-□□-□□□

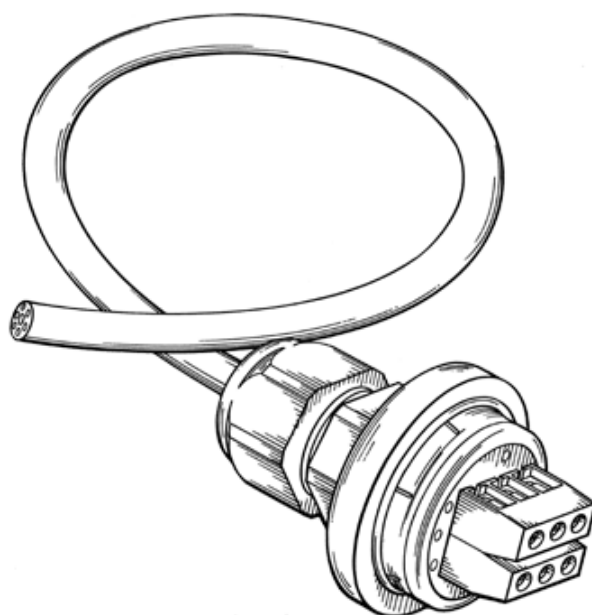


ORDER
FAX CLUMP # 857



6 CONDUCTOR CABLE ASSY

10-72-□□-□□□

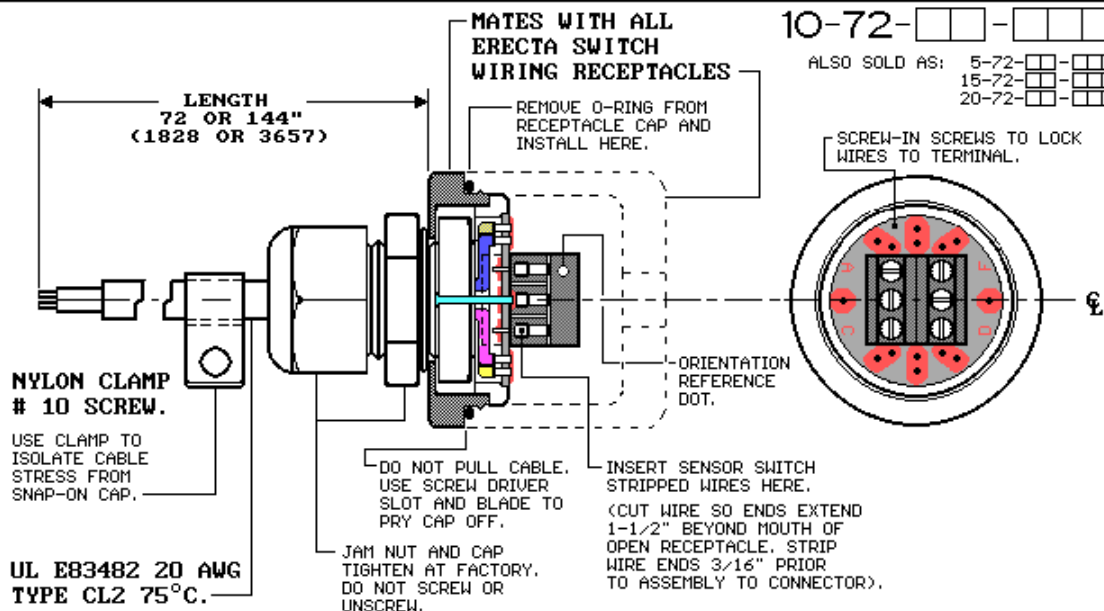 ALSO SOLD AS: 5-72-□□-□□□
 15-72-□□-□□□
 20-72-□□-□□□



CABLE COLOR CODE	
TERMINAL	COLOR
A-B	WHITE WHITE
C-D	BLACK BLACK
E-F	RED RED

SUITABLE FOR 1, 2, OR 3 SPST SENSOR SWITCHES. NO CONNECTION TO UNUSED TERMINALS.

RAIN TIGHT CONSTRUCTION UNSUITABLE FOR IMMERSION IN LIQUID.





MAGNETIC PARTICLE GETTER

10-712-☐☐

ORDER
FAX CLUMP # 858




MAGNETIC PARTICLE GETTER

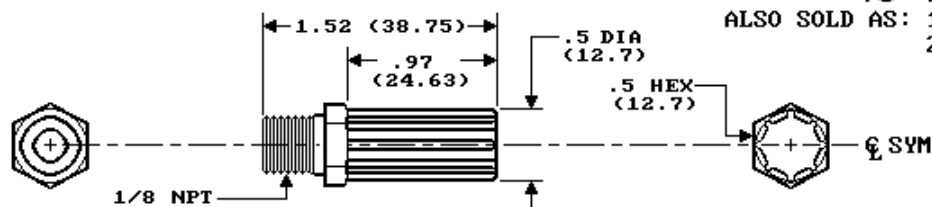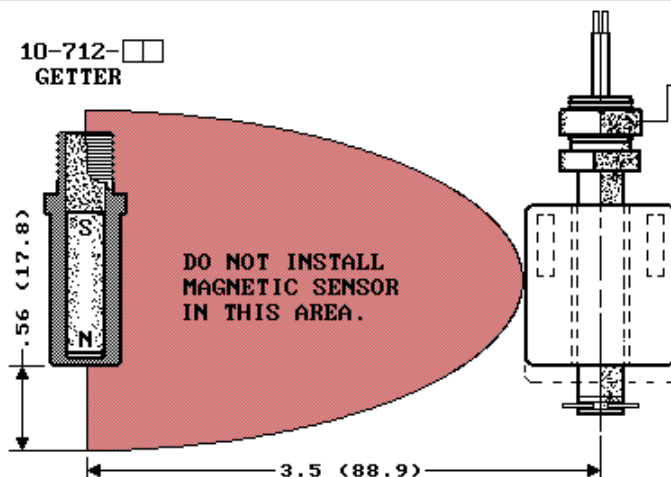10-712-☐☐ALSO SOLD AS: 15-712-☐☐
20-712-☐☐10-712-☐☐
GETTER

GETTER MOUNTED IN PROXIMITY
OF MAGNETIC SENSOR ATTRACTS
MAGNETIC PARTICLES PRESENT
IN LIQUID MEDIUM.




3/8 TYGON TUBING LENGTHS

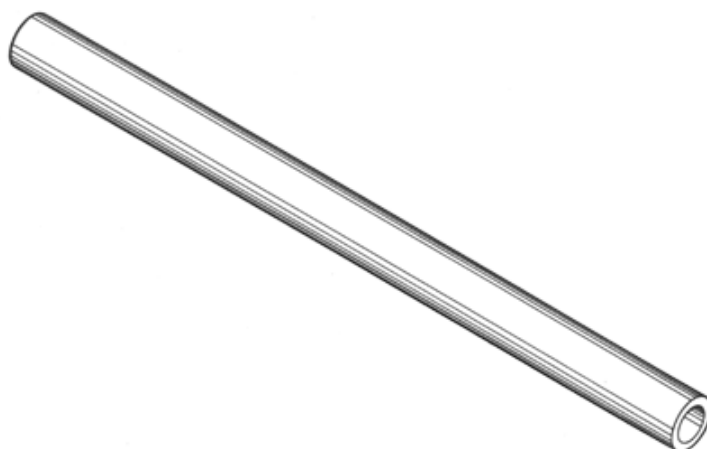10-TU--


ORDER
FAX CLUMP # 859




3/8 TYGON TUBING LENGTHS

 10-TU--
 TYPE _____
 LENGTH _____


TYPE 1
PERISTALTIC
FORMULATION R-3603



TYPE 2
FUEL AND LUBRICANT
FORMULATION F-4040-A




TYPE 3
HEAVY DUTY CHEMICAL
FORMULATION R-3400

MATERIAL: TYGON® TUBING 3/8 OD 1/4 ID.



LP 1-1/4 FLANGE NUT

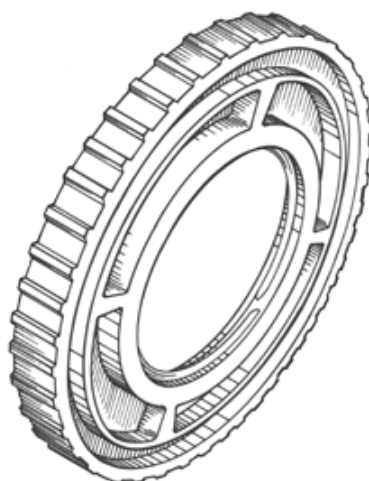10-700-FN-☐

ORDER
FAX CLUMP # 860




LP 1-1/4 FLANGE NUT

10-700-FN-☐

ALSO SOLD AS : 15-700-FN-☐
20-700-FN-☐

1-1/4 NPT
(SINGLE THD)

3.1
(78.74)

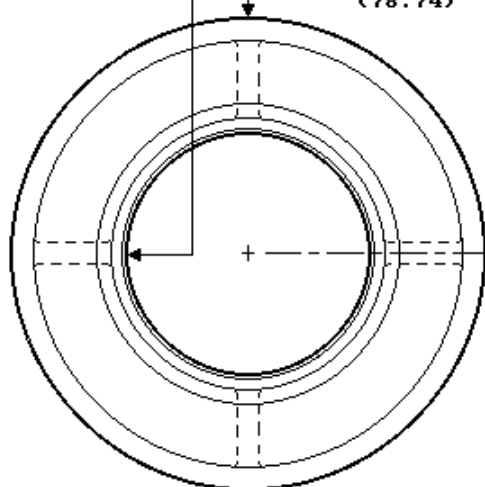


.312
(7.92)



PRESSURE RATING - 10 PSI @ 20 °C DERATE TO ZERO @ 90 °C



LP 1-1/4 FLANGE NUT W/SEAL SET

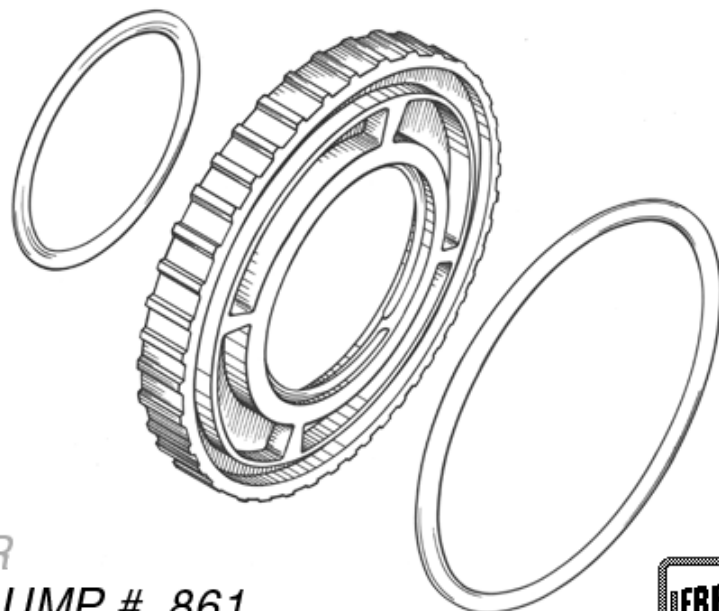10-700-FS-☐


ORDER
FAX CLUMP # 861



LP 1-1/4 FLANGE NUT W/SEAL SET

10-700-FS-☐

ALSO SOLD AS : 15-700-FS-☐
20-700-FS-☐

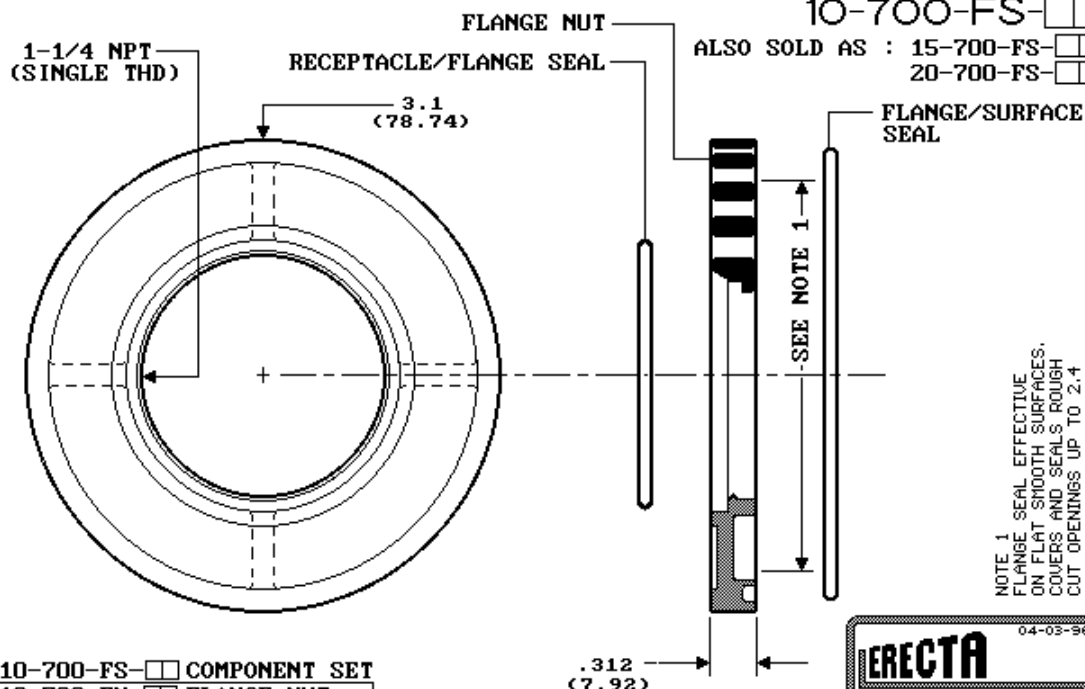


NOTE 1
SEAL EFFECTIVE
ON FLAT SMOOTH SURFACES.
COVERS AND SEALS ROUGH
CUT OPENINGS UP TO 2.4
DIA MAX (60.96).

10-700-FS-☐ COMPONENT SET
10-700-FN-☐ FLANGE NUT
10-700-0-222 O-RING
10-700-0-231 O-RING

PRESSURE RATING - 10 PSI @ 20 °C
DERATE TO ZERO @ 90 °C



LP 1-1/4 - 2 ADAPTER W/SEAL SET

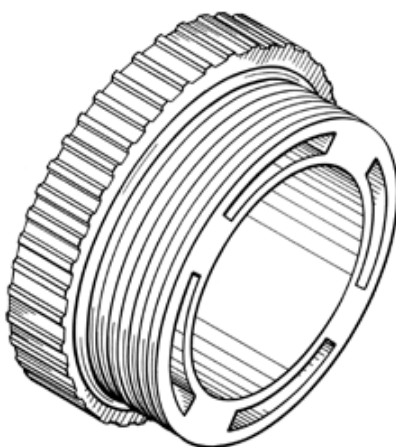10-700-AS-☐


ORDER
FAX CLUMP # 862



LP 1-1/4 - 2 ADAPTER W/SEAL SET

10-700-AS-☐

ALSO SOLD AS : 15-700-AS-☐
20-700-AS-☐

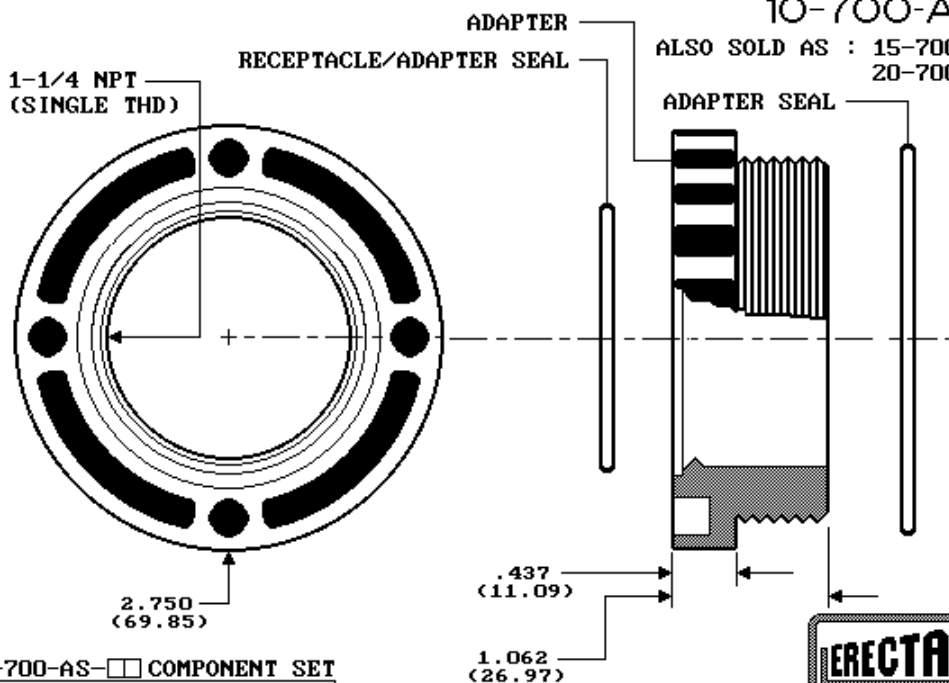


10-700-AS- ☐	COMPONENT SET
10-700-AD- ☐	ADAPTER
10-700-O-128	O-RING
10-700-O-141	O-RING

PRESSURE RATING - 20 PSI @ 20 °C
DERATE TO ZERO @ 90 °C




MINIMUM PENETRATION FLANGE NUT/SEAL SET

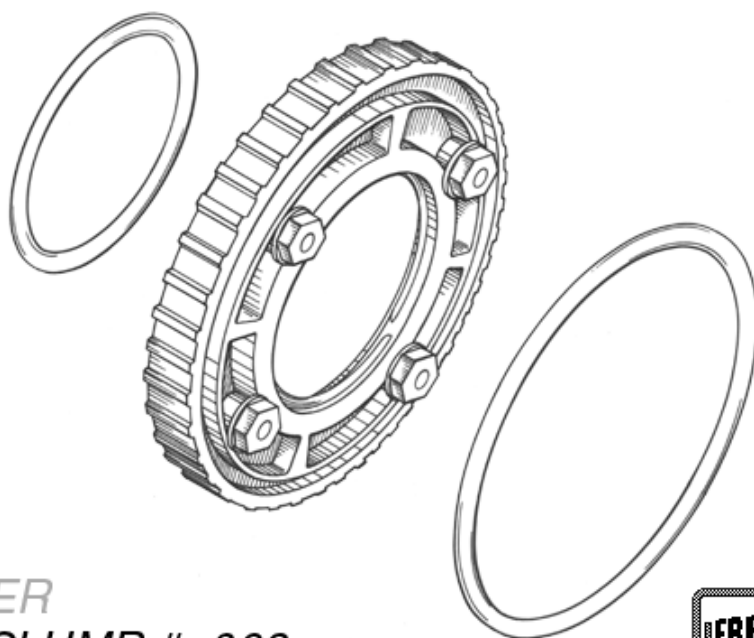10-701-FS-☐

ORDER
FAX CLUMP # 863



MINIMUM PENETRATION FLANGE NUT/SEAL SET

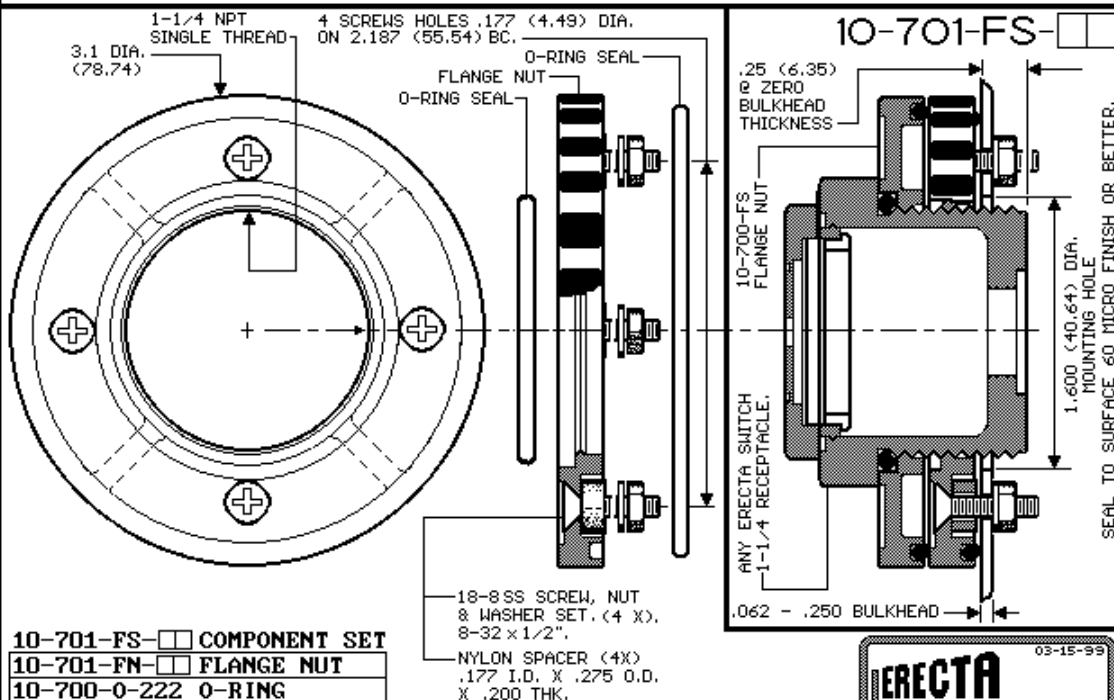10-701-FS-☐


10-701-FS- ☐	COMPONENT SET
10-701-FN- ☐	FLANGE NUT
10-700-0-222	O-RING
10-700-0-231	O-RING
10-701-FNSCR	SS SCREW SET
10-701-FNWS	NYLON SPACER

PRESSURE RATING - 10 PSI @ 20 °C
DERATE TO ZERO @ 90 °C



POP-IN RECEPTACLE PUNCH

10-702-PUNCH




ORDER
FAX CLUMP # 864




POP-IN RECEPTACLE PUNCH

10-702-PUNCH

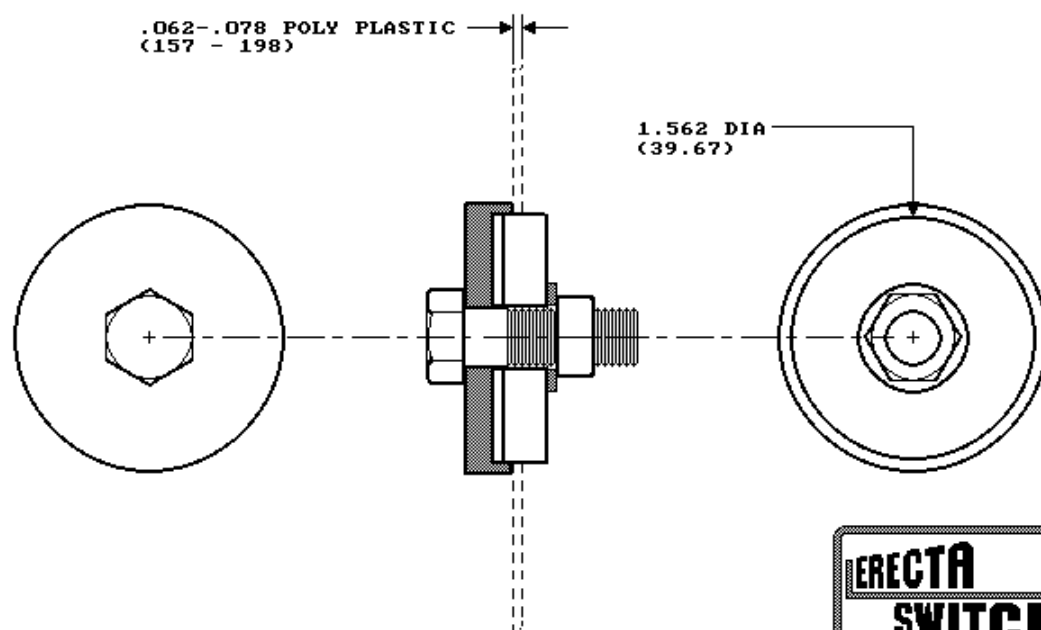

NIPPLE DEPTH GAUGE SET

10-702-GAUGE


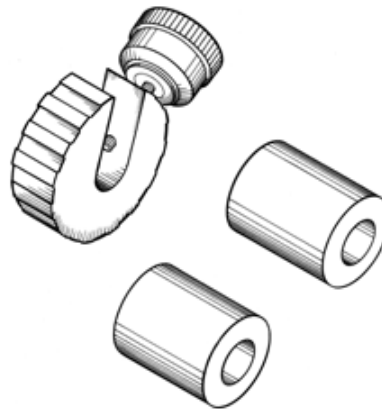


ORDER
FAX CLUMP # 865





NIPPLE DEPTH GAUGE SET

10-702-GAUGE

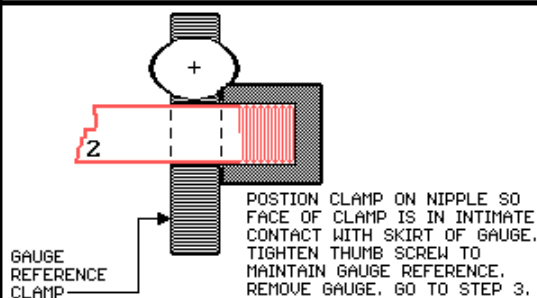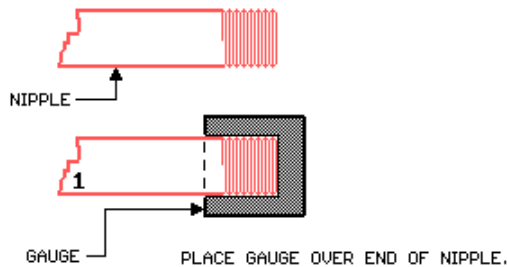

ASSEMBLE NIPPLE, WITH CLAMP IN PLACE, INTO FITTING UNTIL FACE OF REFERENCE MEETS FACE OF FITTING END.

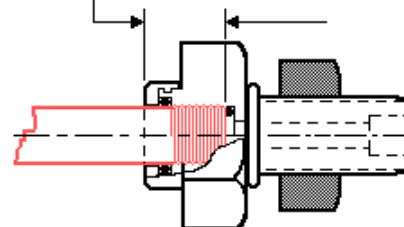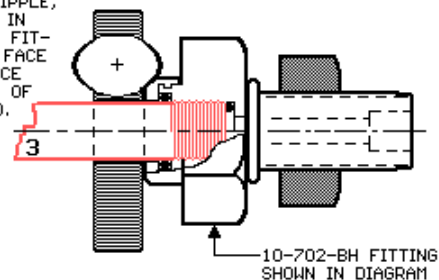


10-700-CS-CIJ STRAIGHT AND 10-702-BH-CIJ BULKHEAD ARE ACCESSORY CONNECTORS FOR USE WITH 10-715-CIJ PRECISION PIPE NIPPLES. TO ASSURE ENGAGEMENT WITH THE O-RING FACE SEAL, USE THE APPROPRIATE GAUGE.

10-700-CS-CIJ = .715 GAUGE
10-702-BH-CIJ = .535 GAUGE



3/4 NPT ADAPTER

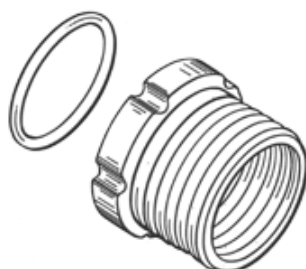15-600-AD-☐☐



ORDER
FAX CLUMP # 866




3/4 NPT ADAPTER

15-600-AD-☐☐

ALSO SOLD AS: 10-600-AD-☐☐
 20-600-AD-☐☐

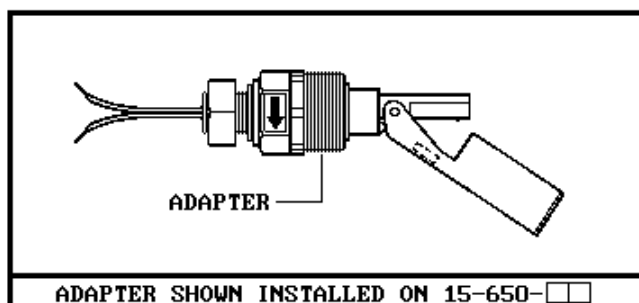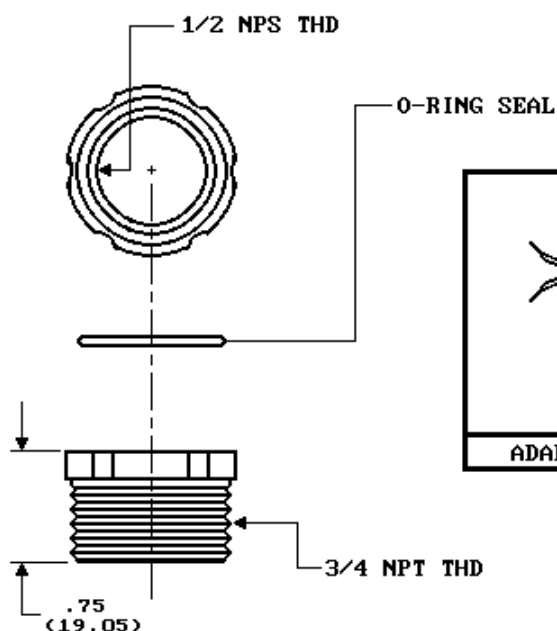


1-1/4 RECEPTACLE C'BORE + O-RING 1/2 NPS

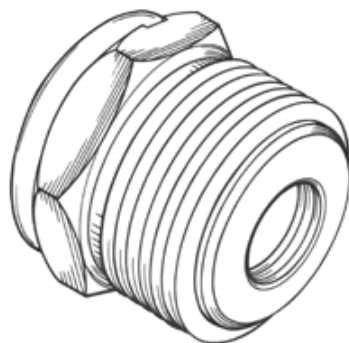15-700-RA-☐☐

ORDER
FAX CLUMP # 867




1-1/4 RECEPTACLE C'BORE + O-RING 1/2 NPS

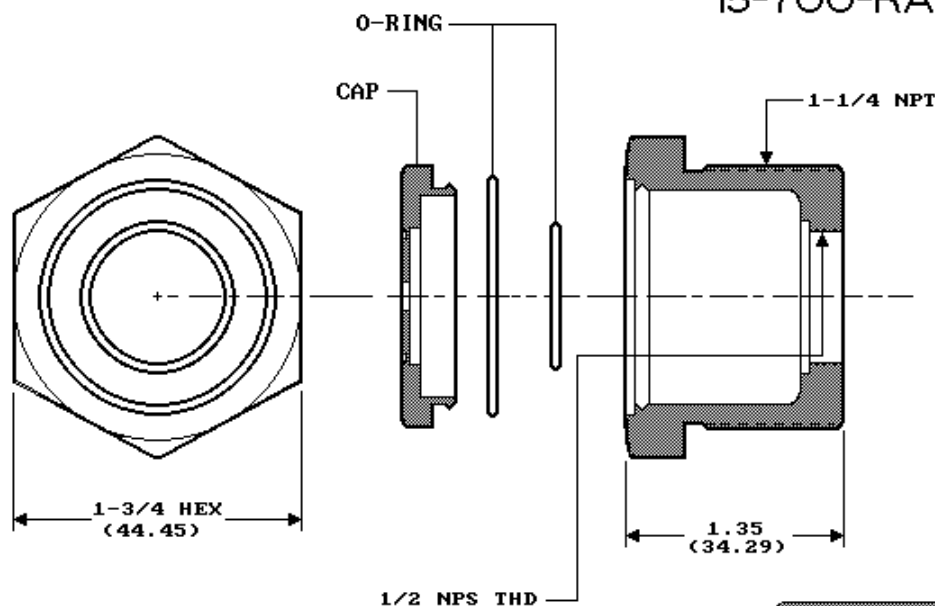15-700-RA-☐☐

PRESSURE RATING - 100 PSI @ 20°C DERATE TO ZERO @ 90°C




RETAINING RING

20-724-☐☐

ORDER
FAX CLUMP # 869



RETAINING RING

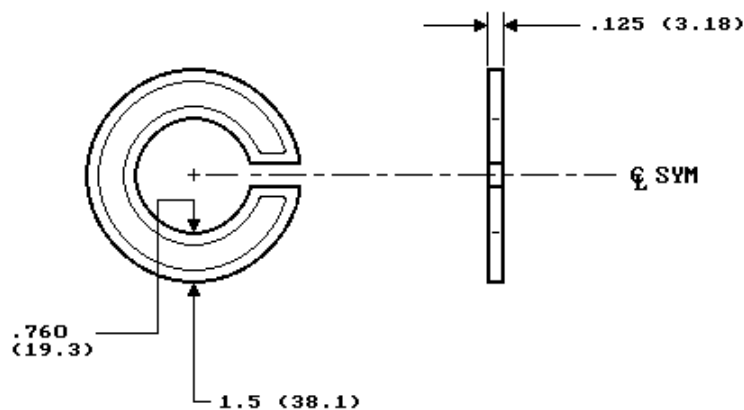20-724-☐☐

NOTE: INTENDED FOR USE
 ON SERIES 20 .840
 DIA. STEMS OR STEMS
 MADE FROM 1/2 IPS
 PIPE.




ADJUSTABLE COLLAR STOP

20-721-☐

ORDER
FAX CLUMP # 870



ADJUSTABLE COLLAR STOP

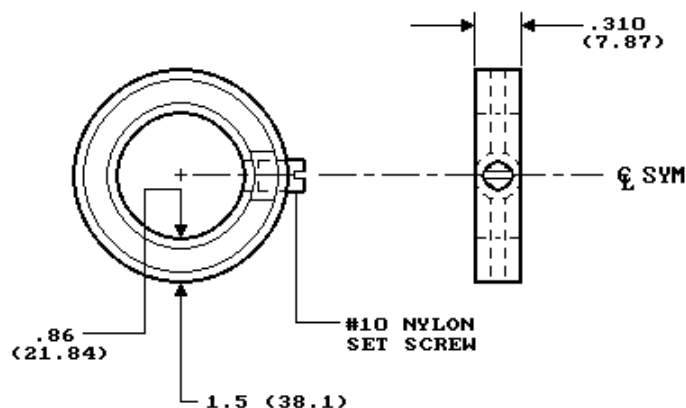20-721-☐

NOTE: INTENDED FOR USE
ON SERIES 20 .840
DIA. STEMS OR STEMS
MADE FROM 1/2 IPS
PIPE.



LEAD-IN BUSHING

20-723-☐

ORDER
FAX CLUMP # 871




LEAD-IN BUSHING

20-723-☐


MATERIAL OPTION

PP = POLYPROPYLENE
AC = ACETAL
KR = KYNAR PUDF

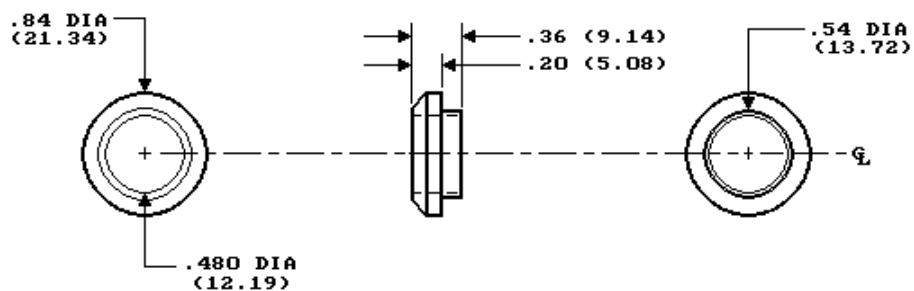

HOLLOW MAGNETIC FLOAT

20-720-□□

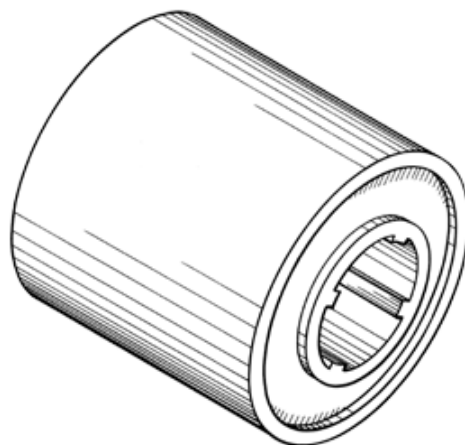


ORDER
FAX CLUMP # 872



HOLLOW MAGNETIC FLOAT

20-720-□□

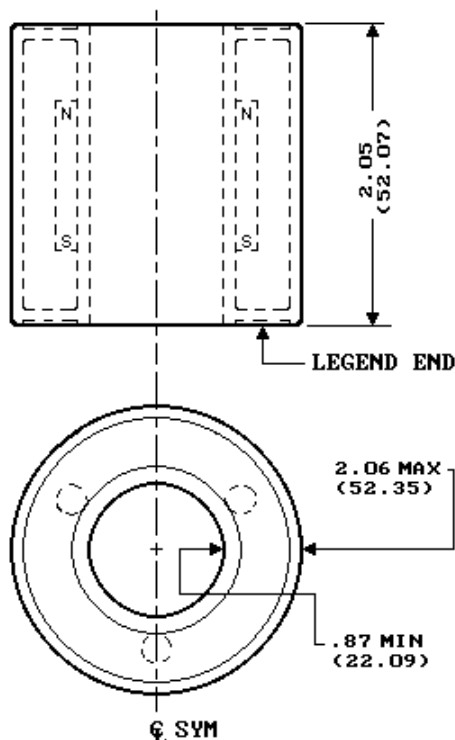

MATERIALS OF CONSTRUCTION

20-720-PP	(Gray & black) Polypropylene
20-720-AC	(Red) Acetal
20-720-KR	(Natural) Kynar PVDF

APPLICATION ENVIRONMENT


Pressure (Hollow float)	20 PSI MAX @ 20°C	Derate, Zero @ 90°C
Temperature	90°C MAX	---
Specific Gravity, PP	.80 MIN	Clear Liquid
Specific Gravity, AC	.75 MIN	Clear Liquid
Specific Gravity, KR	.95 MIN	Clear Liquid

FLOAT BUOYANCY IN SPECIFIC GRAVITY 1.0

	PP		AC		KR		
Float	Inches	MM	Inches	MM	Inches	MM	Medium
Exposed	1.0	25.4	0.65	16.5	0.30	7.6	air
Submerged	1.05	26.7	1.40	35.6	1.75	44.5	Water
Height	2.05	52.1	2.05	52.1	2.05	52.1	---



STEM

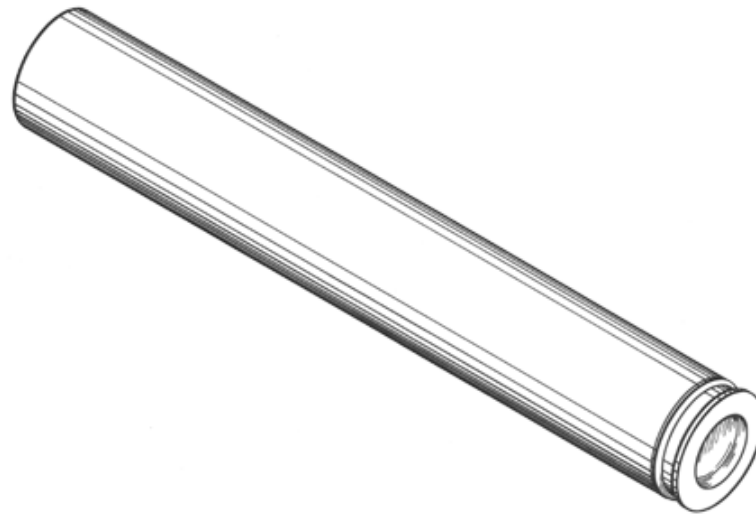20-722--

ORDER
FAX CLUMP # 873



STEM

20-722--

MATERIAL OPTION


PP = POLYPROPYLENE

AC = ACETAL

KR = KYNAR PUDF

LENGTH 20" INCREMENTS


20 TO 60"

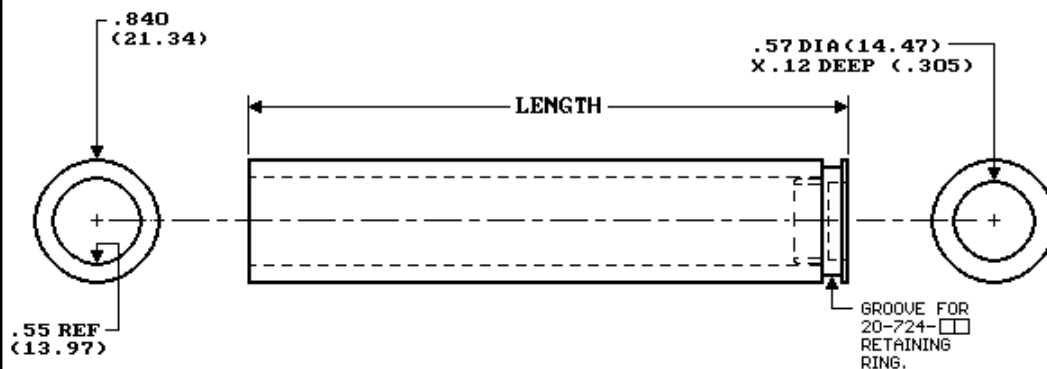

NOTE: EQUAL TO SCH 80 IPS PIPE.
CLOSED END WELDED.



1-1/4 RECEPTACLE (1 NPT THD)

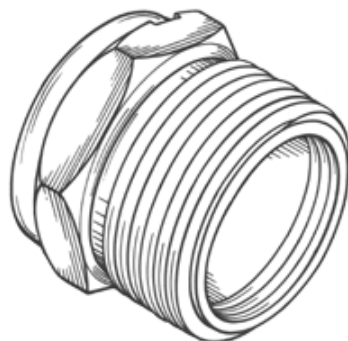20-700-RP-☐☐

ORDER
FAX CLUMP # 874



1-1/4 RECEPTACLE (1 NPT THD)

20-700-RP-☐☐

1/2 CONDUIT
KNOCKOUT

SEE 20-700-WC
LIQUID TIGHT
WIRING CONNECTOR



RECEPTACLE

O-RING

SNAP-ON CAP

SELECT MATERIAL: ☐ PD (POLYPROPYLENE)☐ AC (ACETAL)☐ KR (PVDF)

1-1/4 NPT

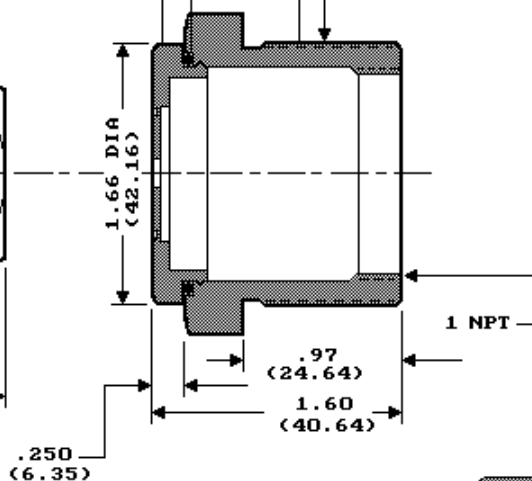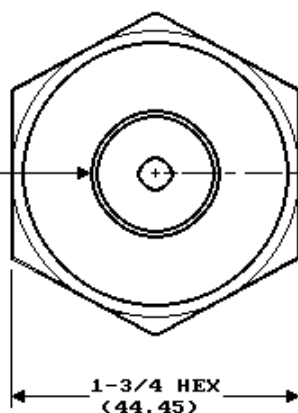

DO NOT DEPEND UPON SNAP ATTACHMENT
TO SUPPORT CABLE OR CONDUIT.
SEE 20-705-WC MATING CONNECTOR.



RECEPTACLE (1 NPT THD)

20-701-RP-☐☐


ORDER
FAX CLUMP # 875



RECEPTACLE (1 NPT THD)

20-701-RP-☐☐

SELECT MATERIAL: ☐ PP (POLYPROPYLENE)
☐ AC (ACETAL)
☐ KR (PUDF)

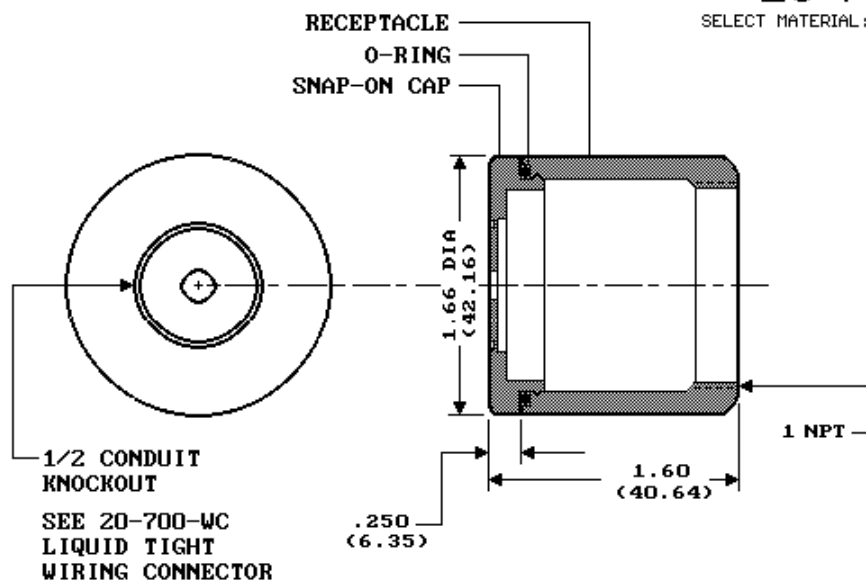

DO NOT DEPEND UPON SNAP ATTACHMENT
 TO SUPPORT CABLE OR CONDUIT.
 SEE 20-705-WC MATING CONNECTOR.



1/2 IPS STEM STOP/CENTER

20-705-SC




ORDER
FAX CLUMP # 876




1/2 IPS STEM STOP/CENTER

20-705-SC

MATERIAL: POLYPROPYLENE

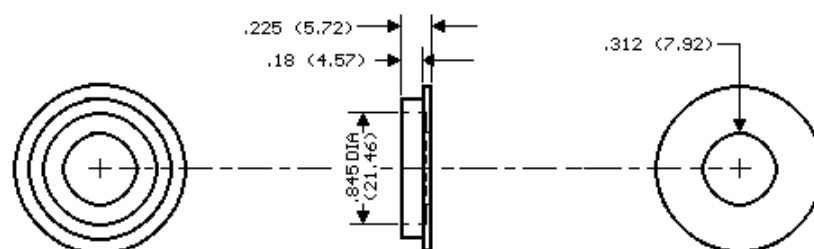

1/2 IPS LIQUID TIGHT CONNECTOR

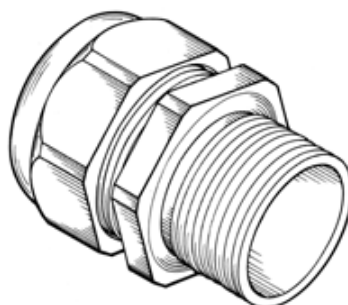20-704-WC-☐☐


ORDER
FAX CLUMP # 877



1/2 IPS LIQUID TIGHT CONNECTOR

20-704-WC-☐☐

SELECT MATERIAL: ☐ NY (NYLON)
☐ KR (PUDF)

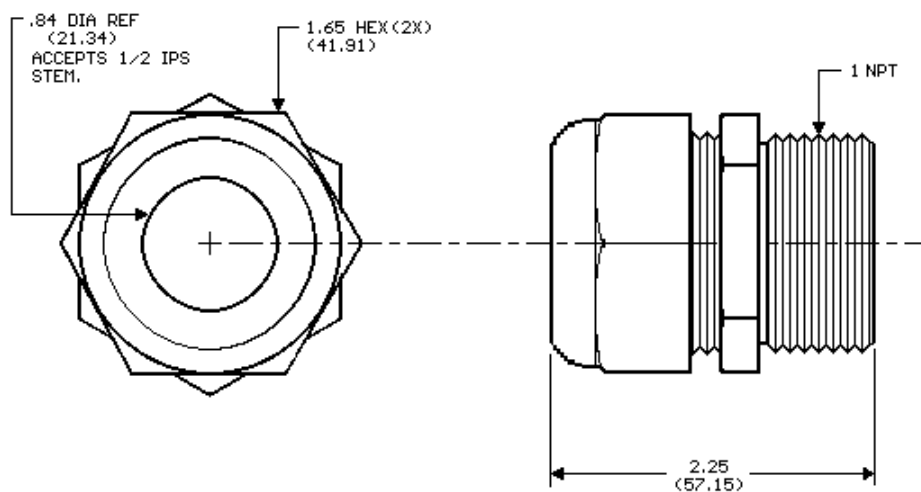


INTERNAL SEAL: NYLON VERSION - BUNA-N
PUDF VERSION - VITON

PRESSURE RATING:
10 PSI @ 20°C. DERATE TO ZERO @ 90°C.



1/2 IPS LIQUID TIGHT CONNECTOR

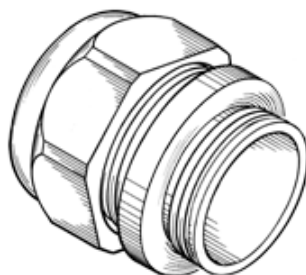20-705-WC-☐☐


ORDER
FAX CLUMP # 878



1/2 IPS LIQUID TIGHT CONNECTOR

20-705-WC-☐☐

SELECT MATERIAL: ☐ (NYLON)
☐ (PUDF)

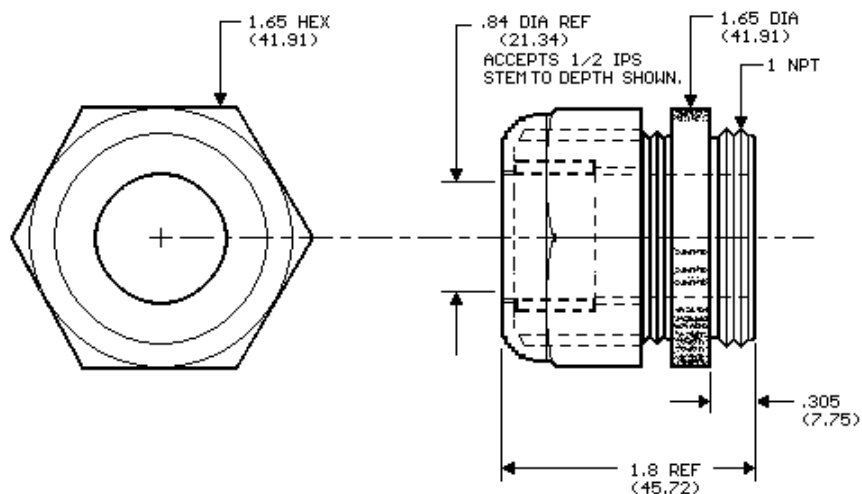


INTERNAL SEAL: NYLON VERSION - BUNA-N
PUDF VERSION - VITON

PRESSURE RATING:
10 PSI @ 20°C. DERATE TO ZERO @ 90°C.



1/2 IPS LIQUID TIGHT CONNECTOR SET

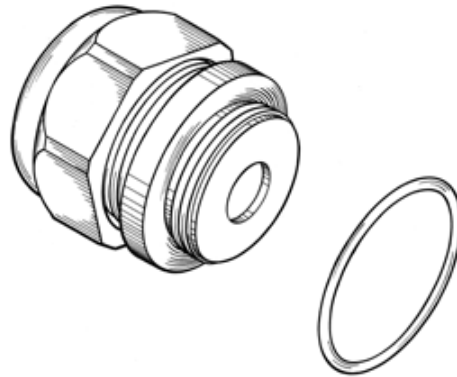20-706-WC-☐☐


ORDER
FAX CLUMP # 879



1/2 IPS LIQUID TIGHT CONNECTOR SET

20-706-WC-☐☐

SELECT MATERIAL: ☐ NY (NYLON)
☐ KR (PUDF)

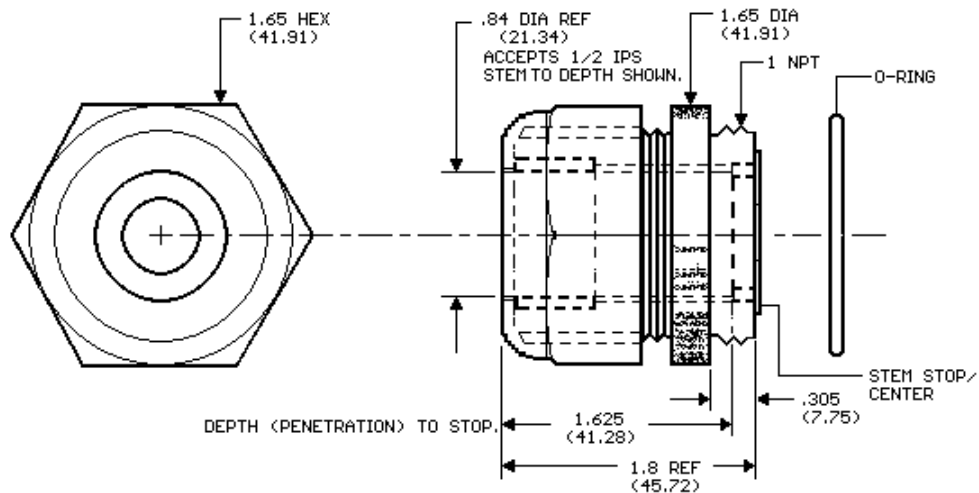20-706-WC-☐☐ COMPONENTS20-705-WC-☐☐ CONNECTOR

20-700-0-139 O-RING

20-705-SC STOP/CENTER

O-RING: VITON

INTERNAL SEAL: NYLON VERSION - BUNA-N
PUDF VERSION - VITON

PRESSURE RATING:

10 PSI @ 20°C. DERATE TO ZERO @ 90°C.

